



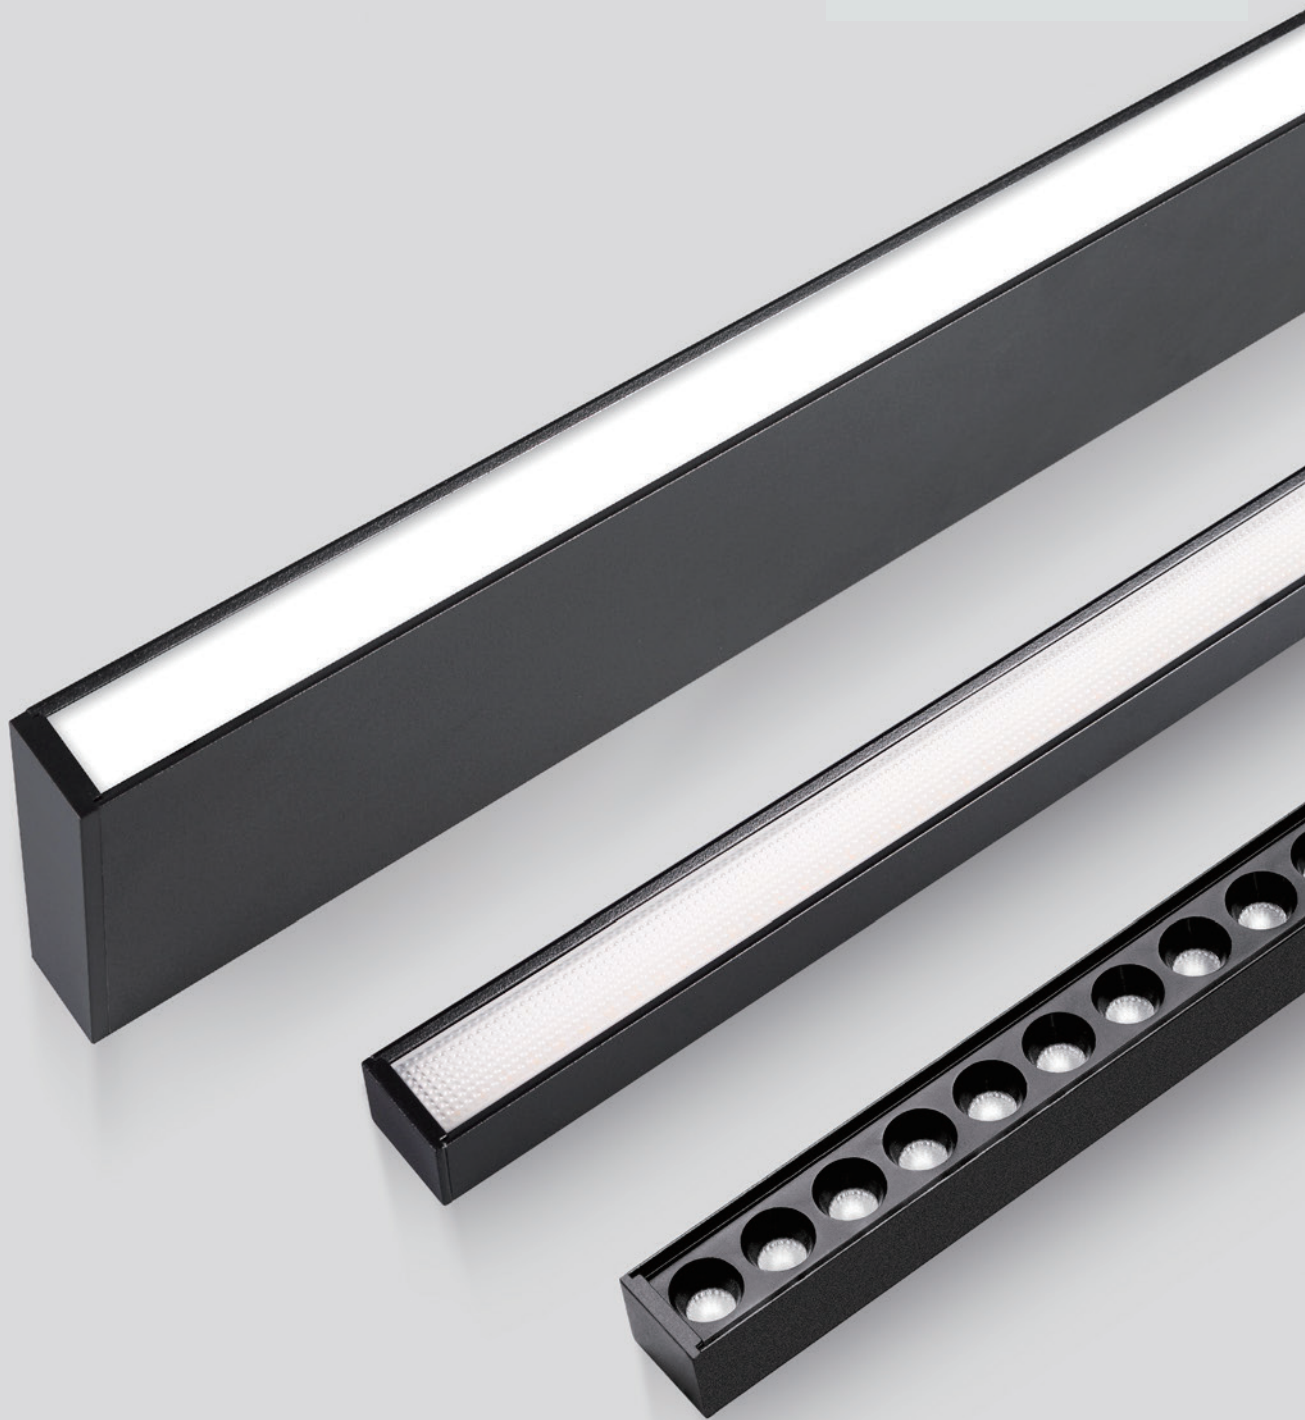

LLS-SLIM

Linear Lighting System

-Slim-

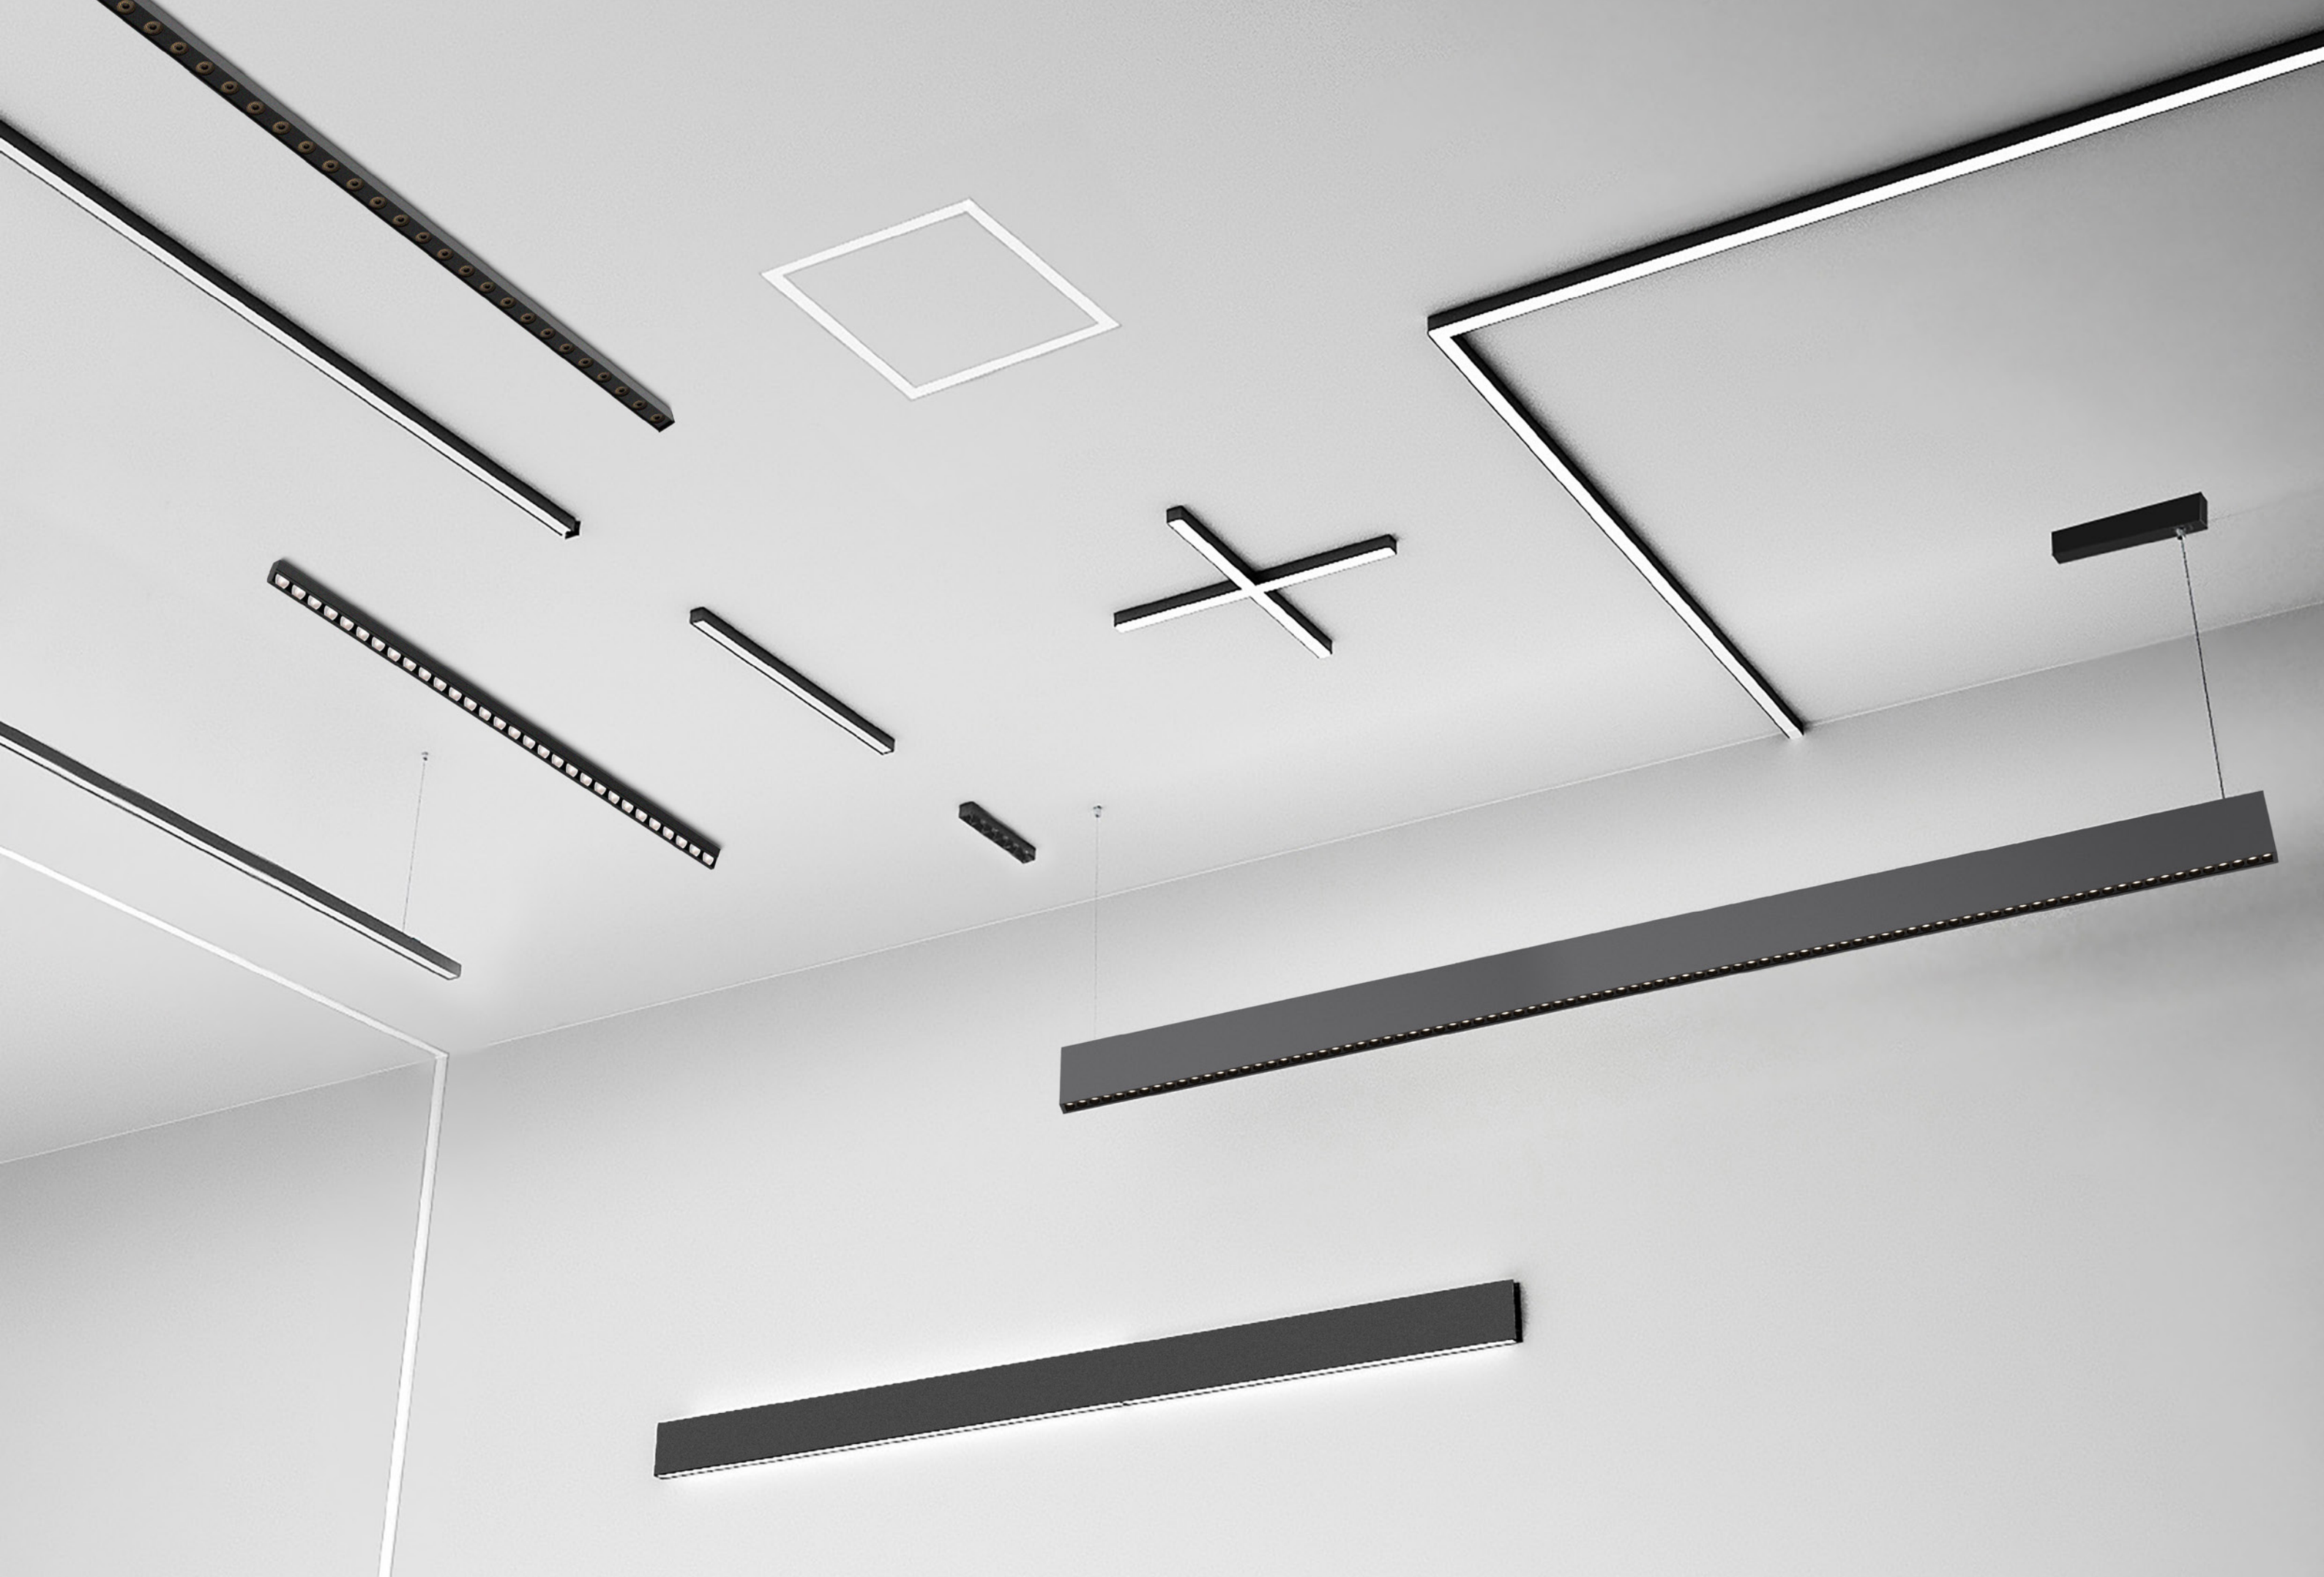




25
mm



120
LM/W

8
optics


∞
application

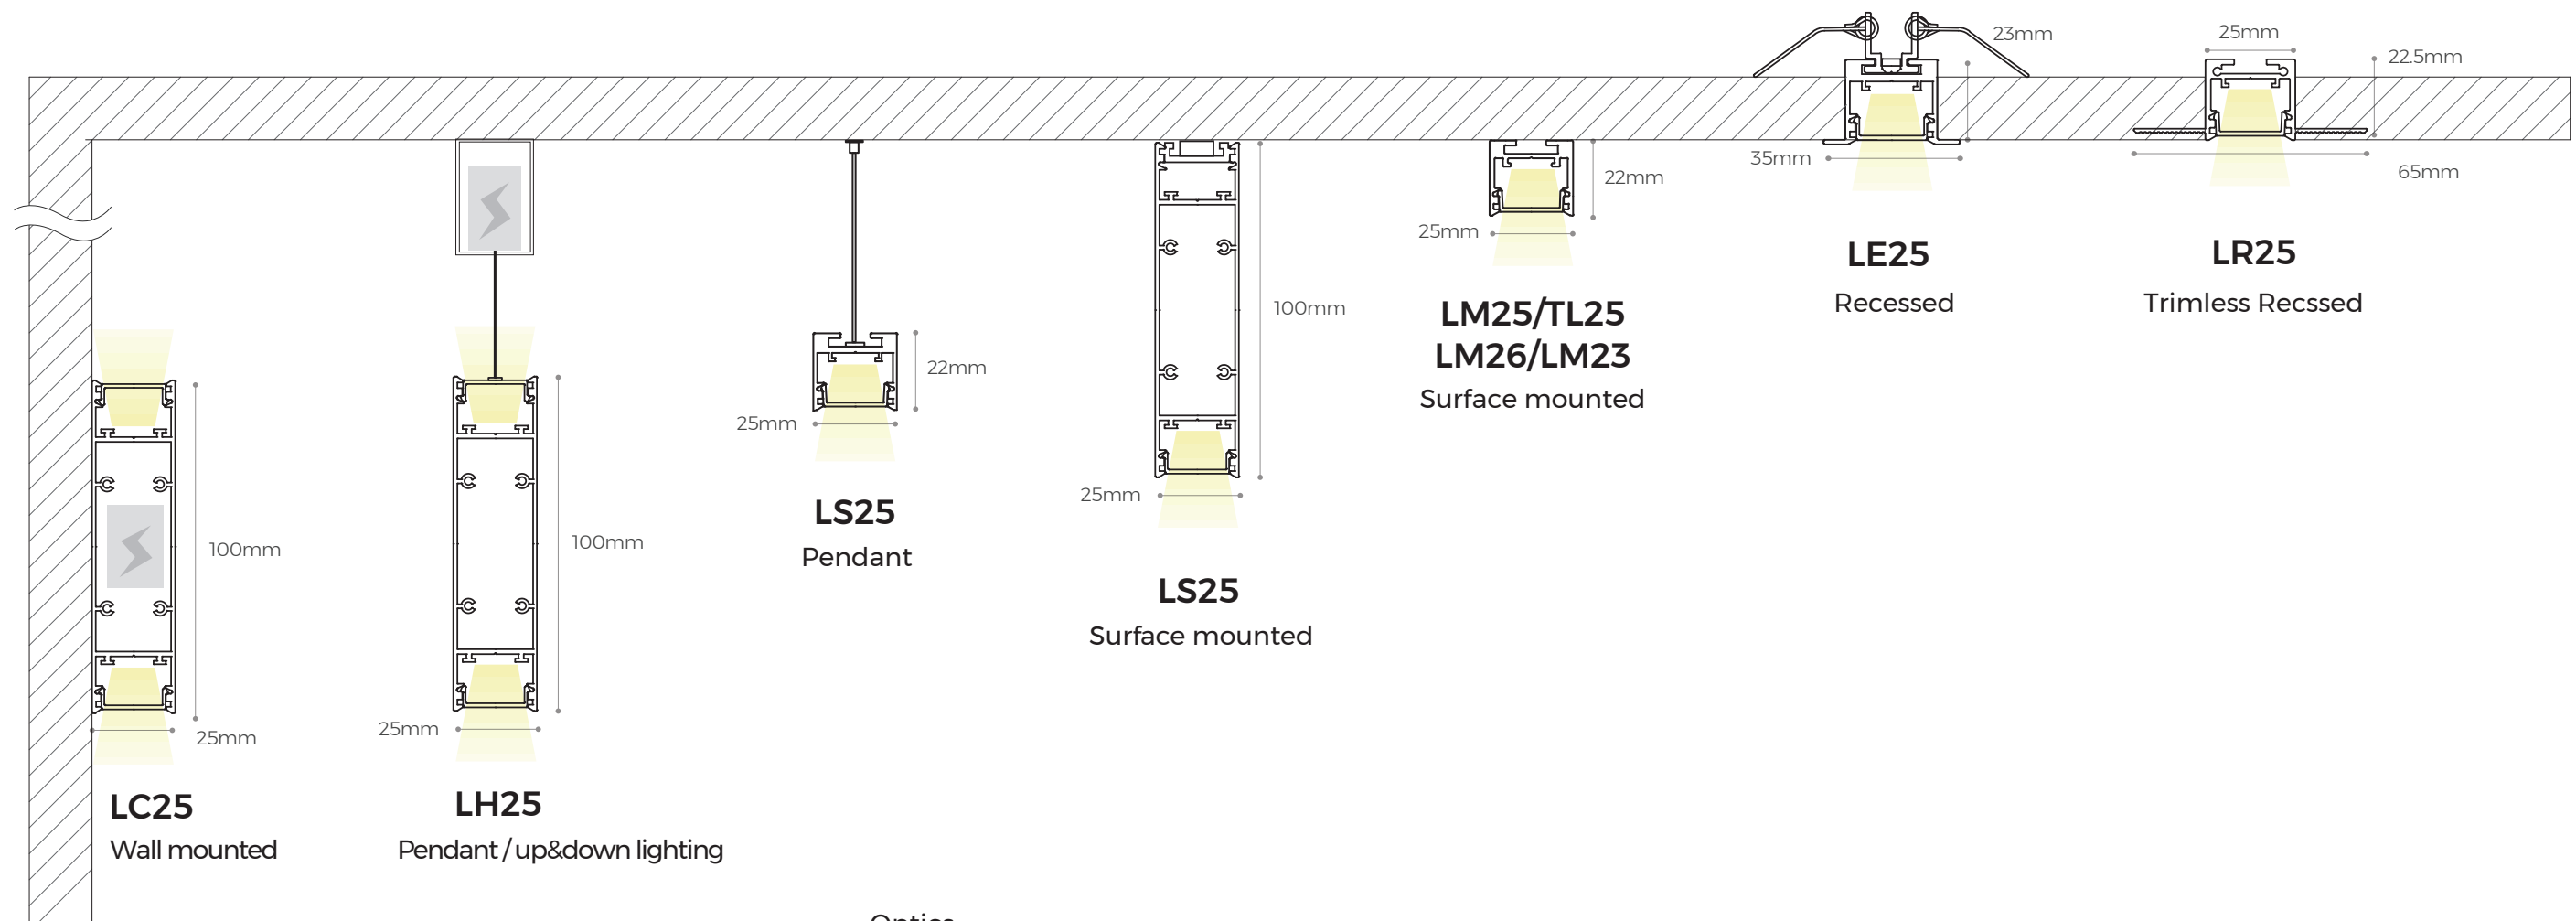


Length

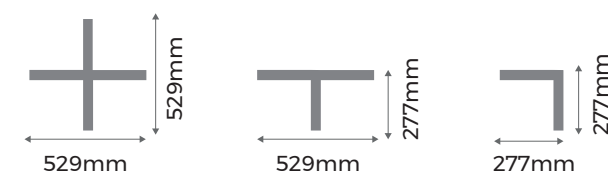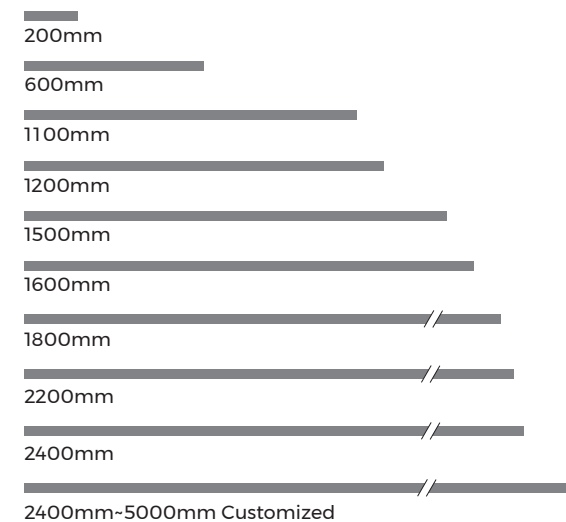

Optics

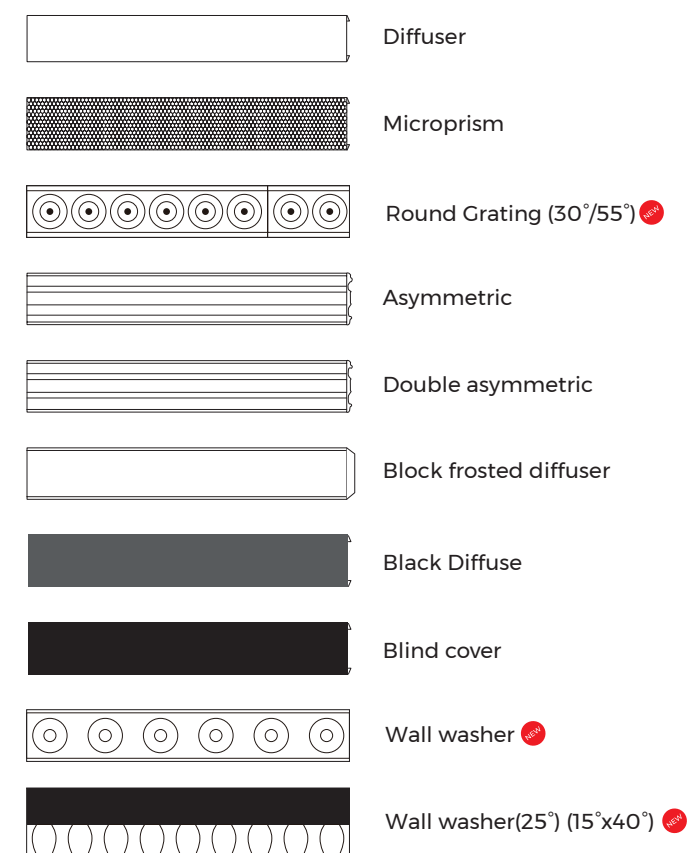


Connector



Installation accessories




Power box

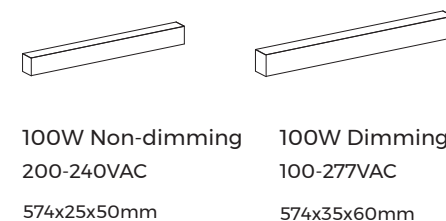


Finishes




Lighting source




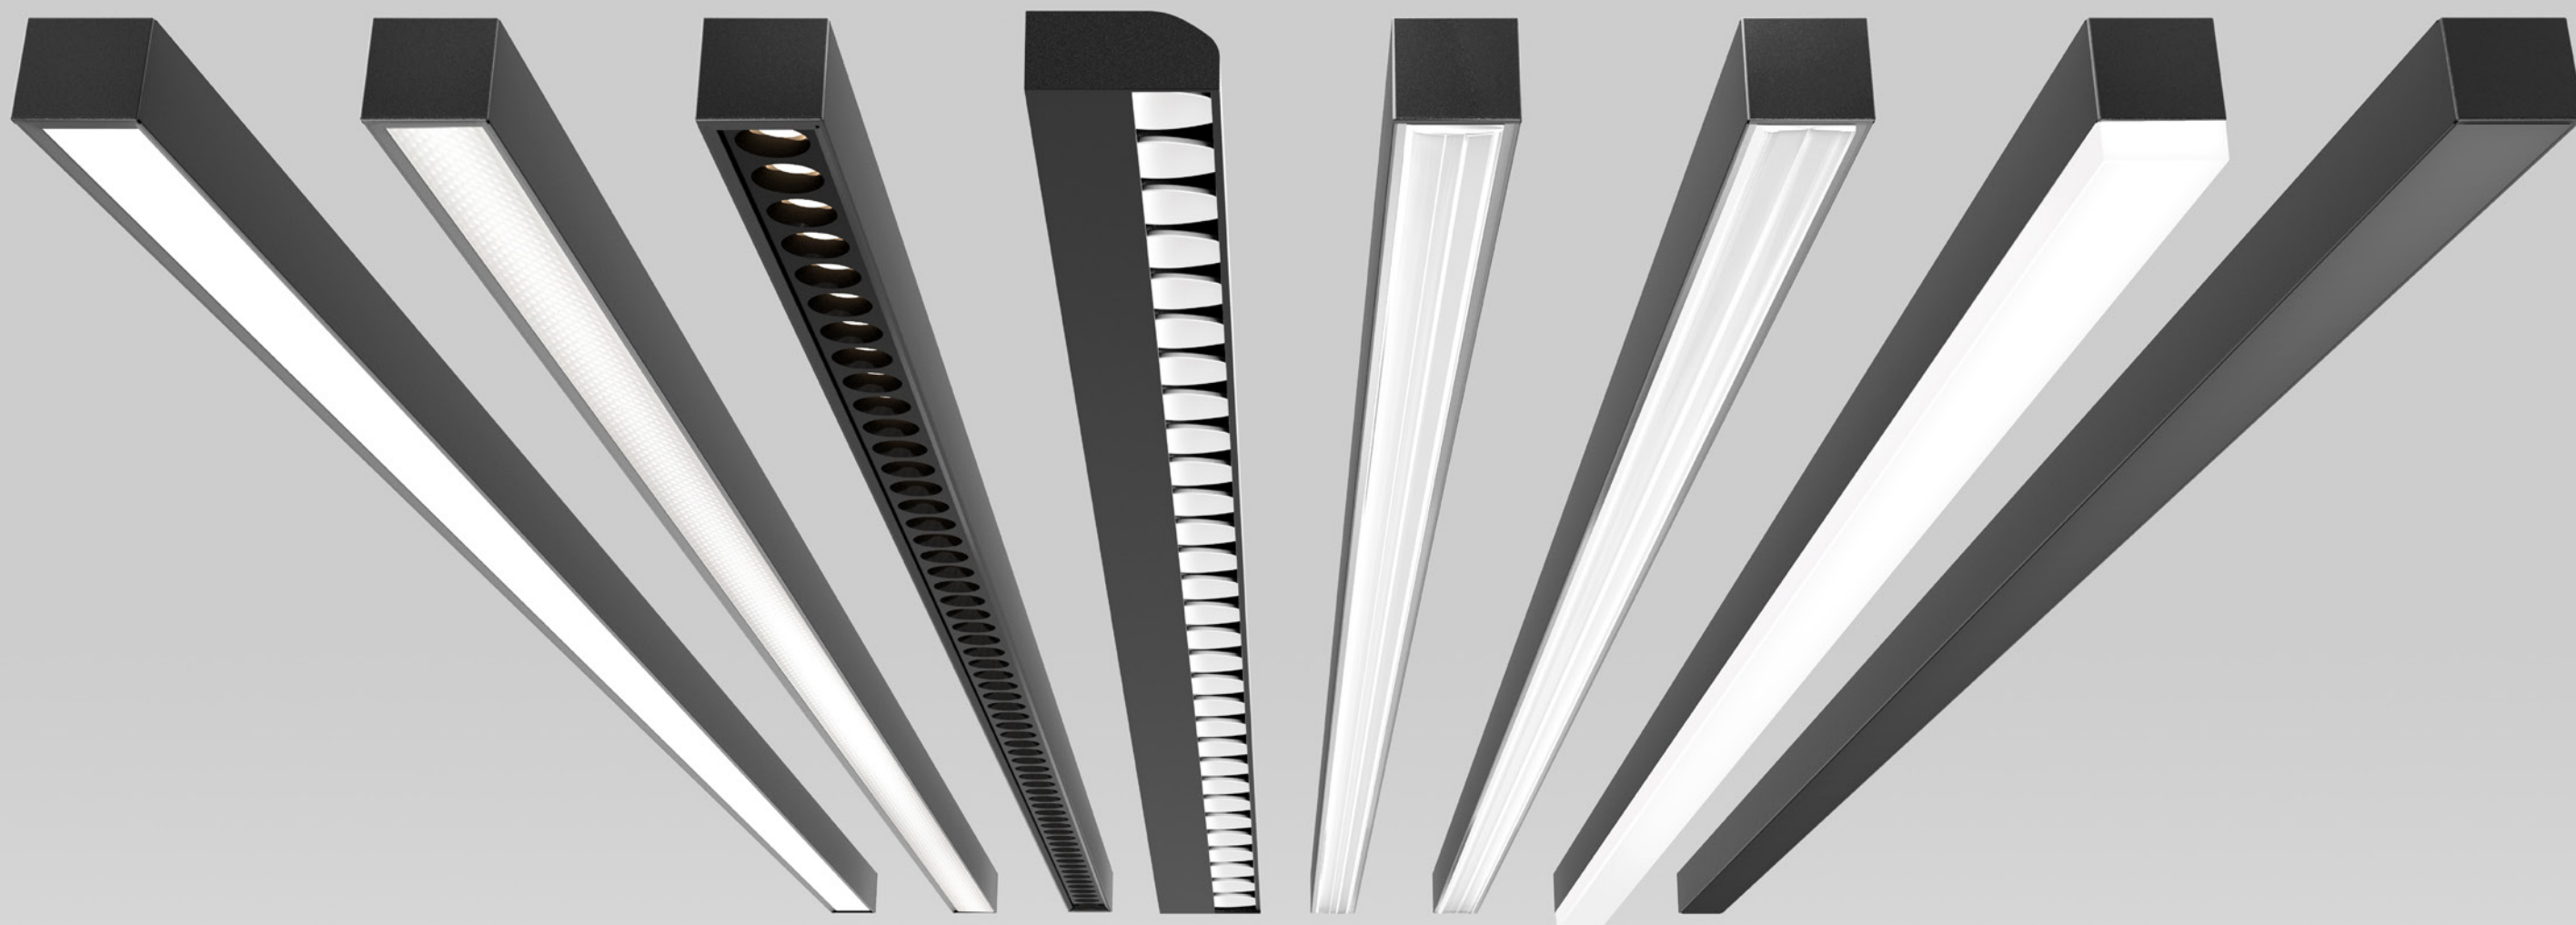


Multiple light distributions, more choices

BE IN LIGHTS ' SLIM series is a standard mini-sized linear luminaire, which can achieve multiple light distributions via professional optical and structural design, e.g. diffuser (100°), prismatic (65°), grating (30°), grating (55°), asymmetric (90° x45° x15°), double asymmetric (100°x90°x15°), block frosted diffuser (110°x165°).

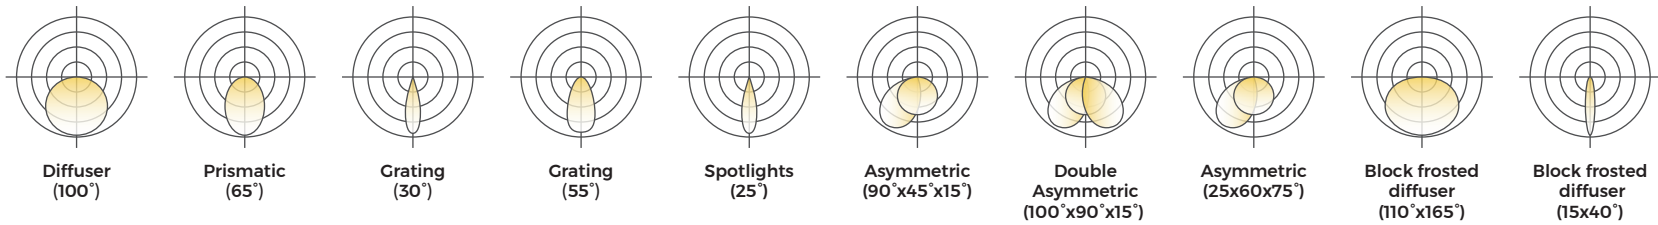

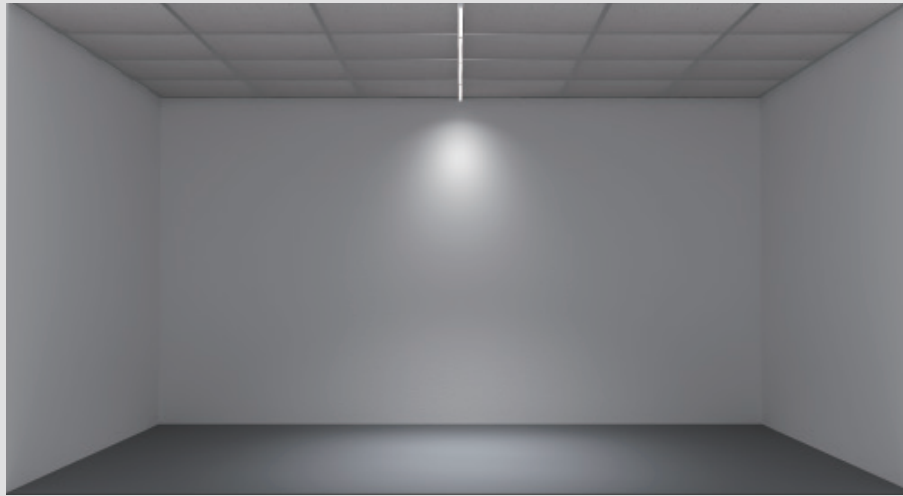


Diffuser

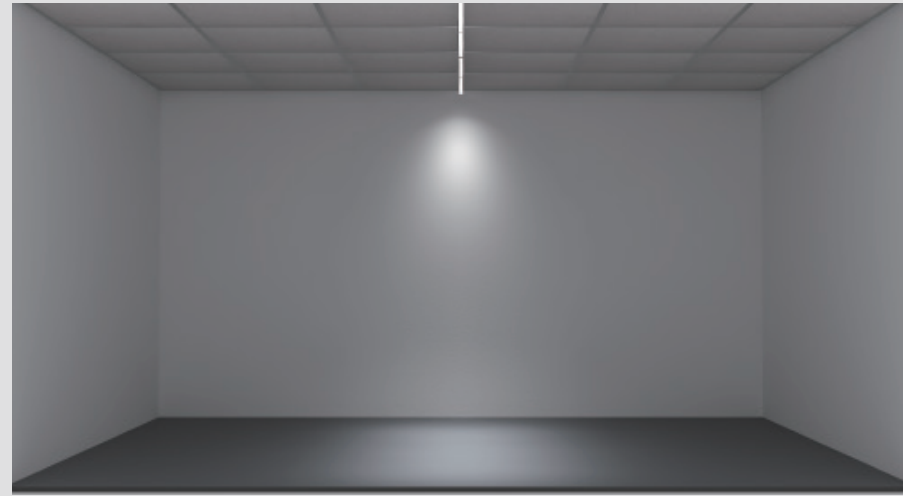


Prismatic




Grating30°

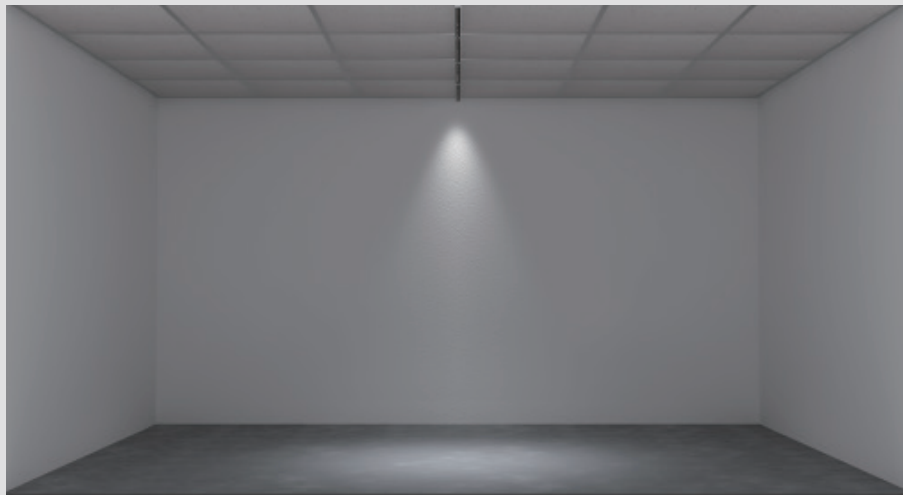

Grating 55°

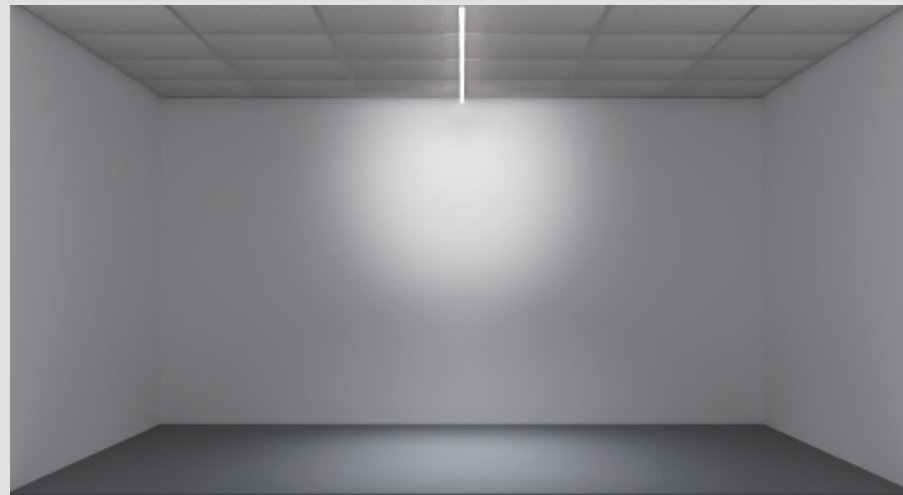

Block frosted diffuser

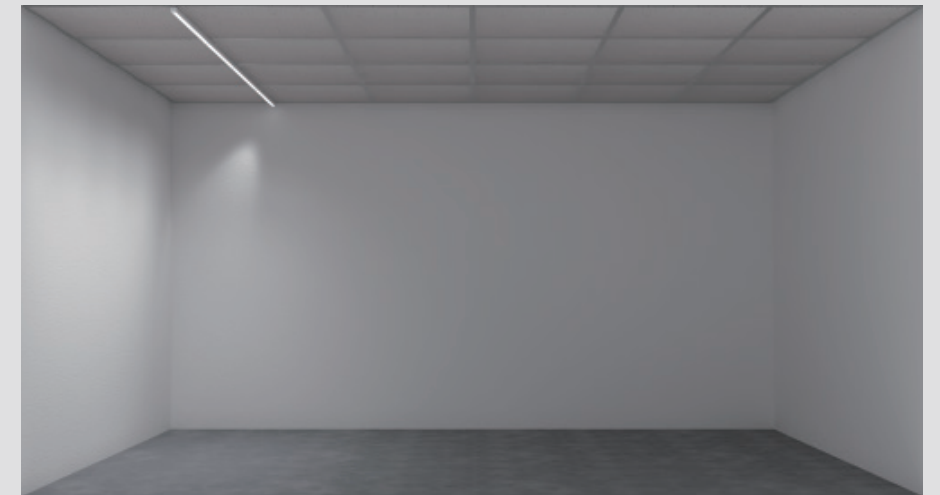


Asymmetric




Double asymmetric



Blind cover

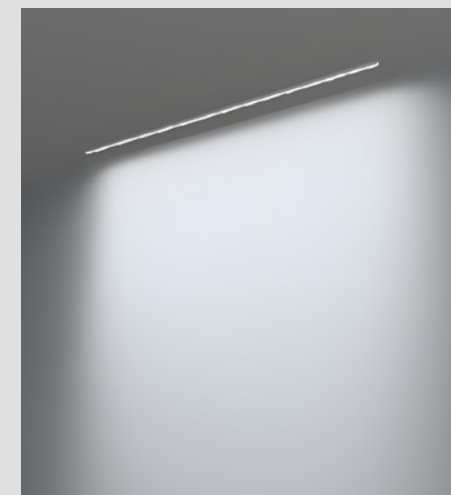

Wall washer(25°) (15°x40°)

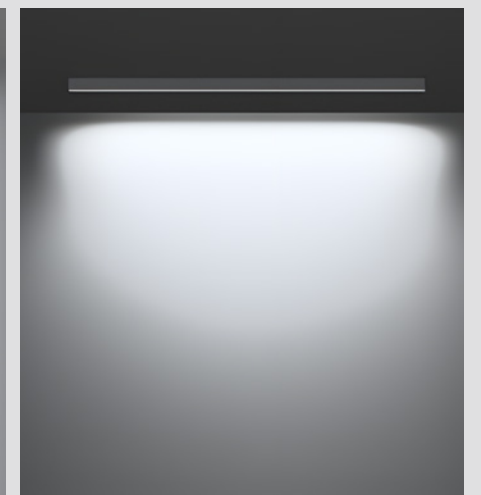

Wall washer

120

LM/W


2375

LM/M

High lumen output
High lighting efficiency

PET

>95% Reflectivity



CRI > 80

CRI > 90

2700
K

3000
K

3500
K

4000
K

5000
K

6500
K

1
BIN
ONLY

3
SDCM≤3

Same
Forever

LM-80



Diffuser

105 LM/W



Microprism

105 LM/W



Round
Grating
(30°/55°)

85 LM/W



Asymmetric

120 LM/W



Double
asymmetric

120 LM/W



Block frosted
diffuser

100 LM/W


*Base on CRI80 4000K

Round Grating Type NEW

- ⦿ Reflective cup design, more refined look
- ⦿ Precise light control, low light loss
- ⦿ Premium light spot, smooth transition
- ⦿ Low glare, UGR<10 (30°)


Traditional Light Spot Effects

- ✗ Stiff transition
- ✗ Low illuminance
- ✗ Probable yellow spots




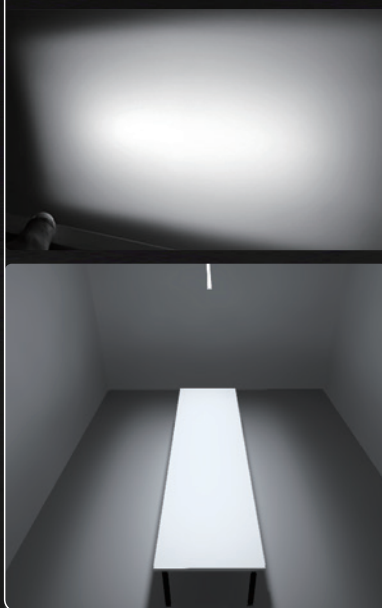


Round Grating Type Effects



- ✓ Effects of Round Grating Type
- ✓ Uniform light spot, no yellow spot
High illuminance, softer transition
- ✓ Installation 2.8m/850lx

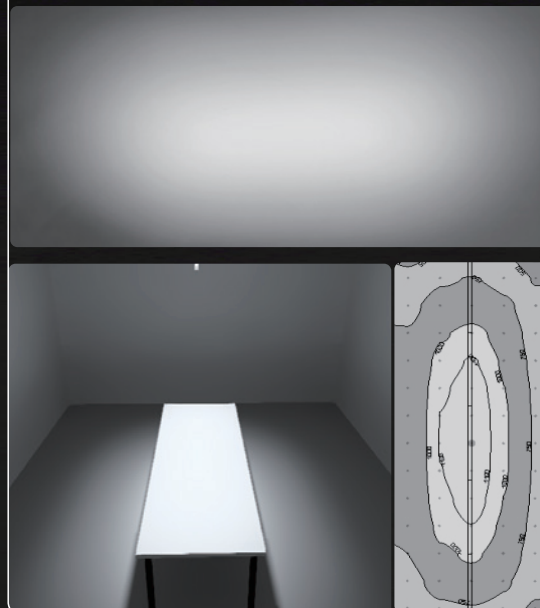


Installation-drywal

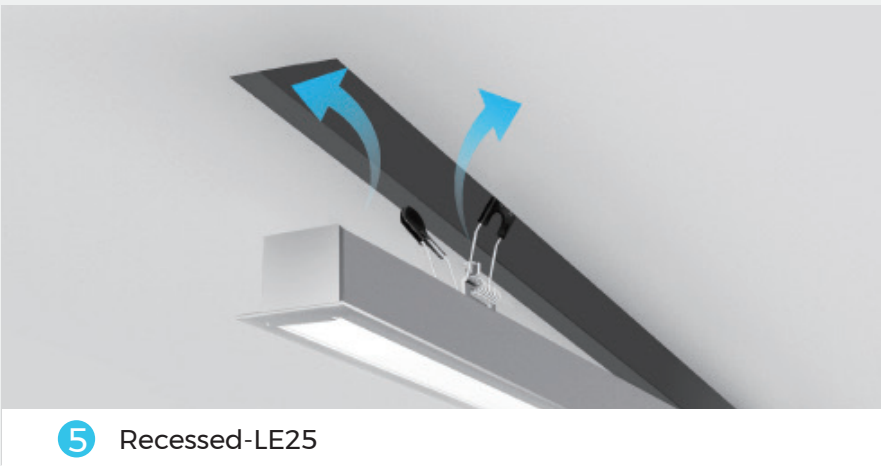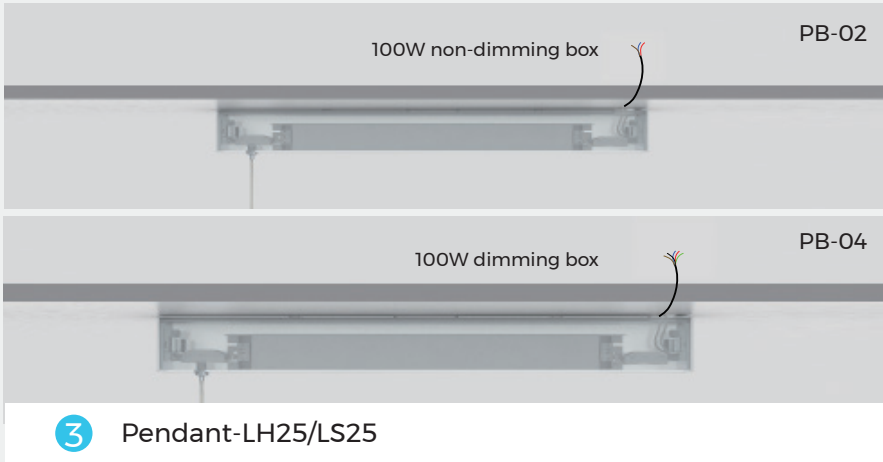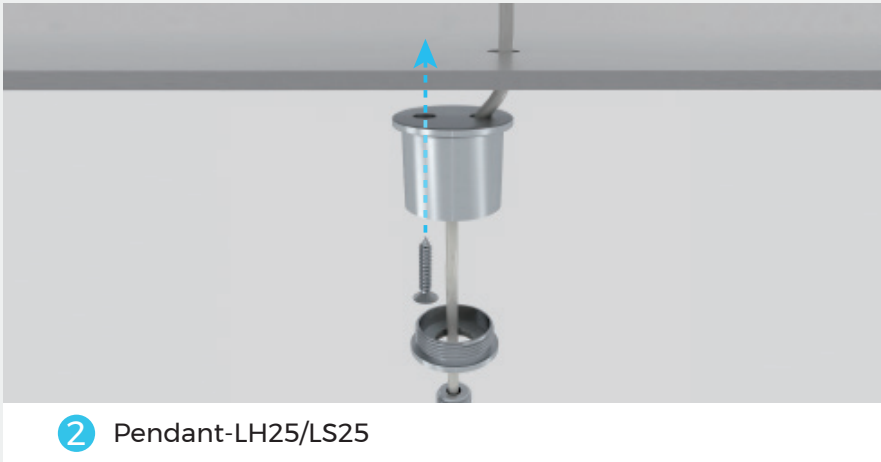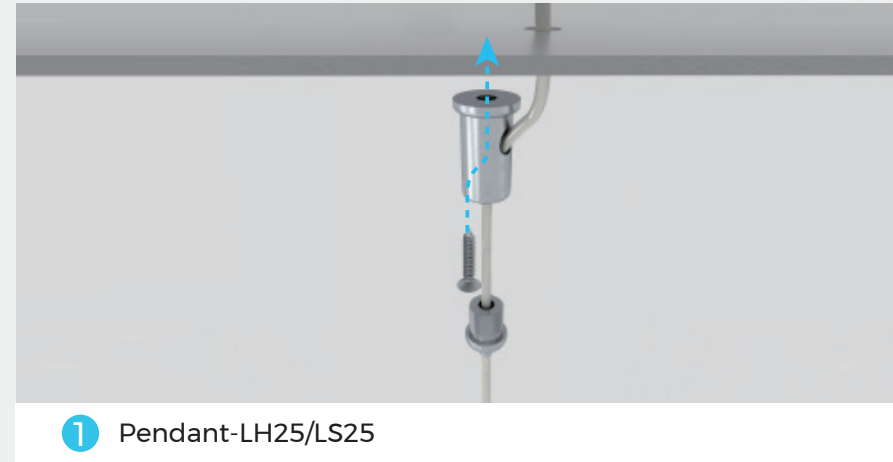

Installation-brick wall

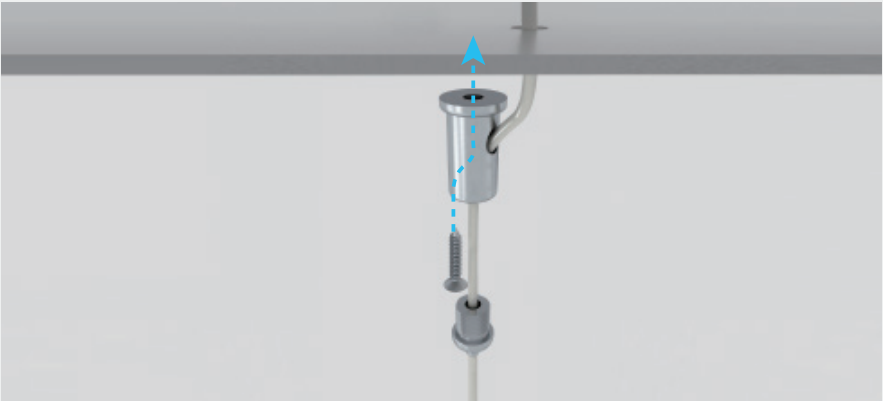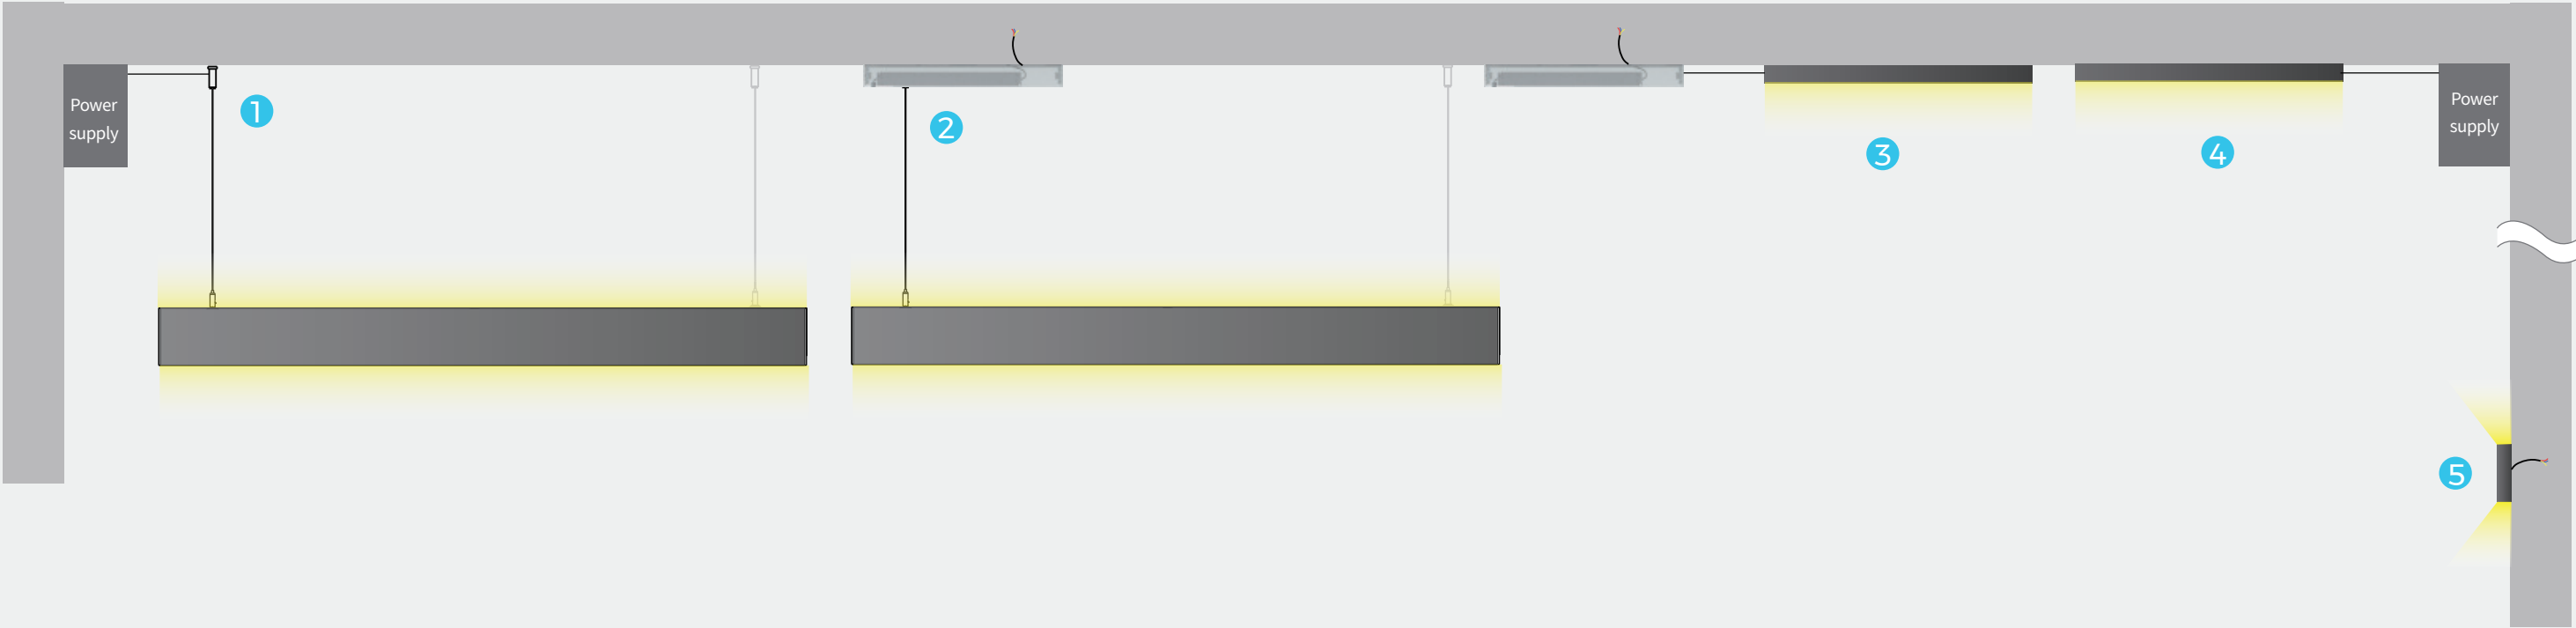


1 Pendant-LH25/LS25

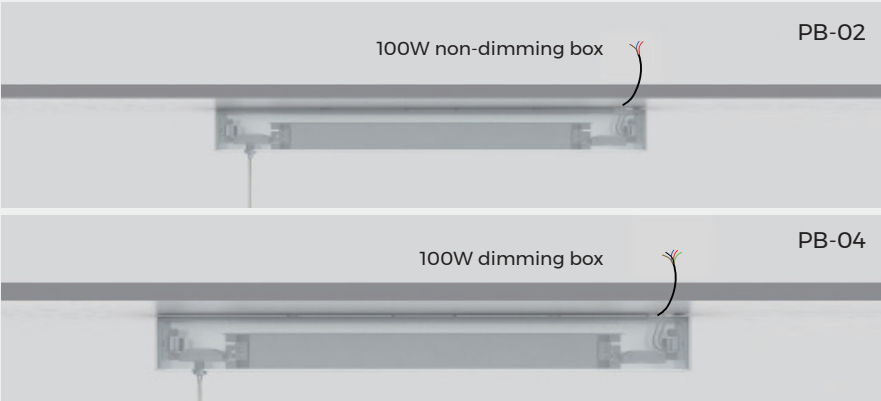

2 Pendant-LH25/LS25





3 4 Surface mounted-LM25


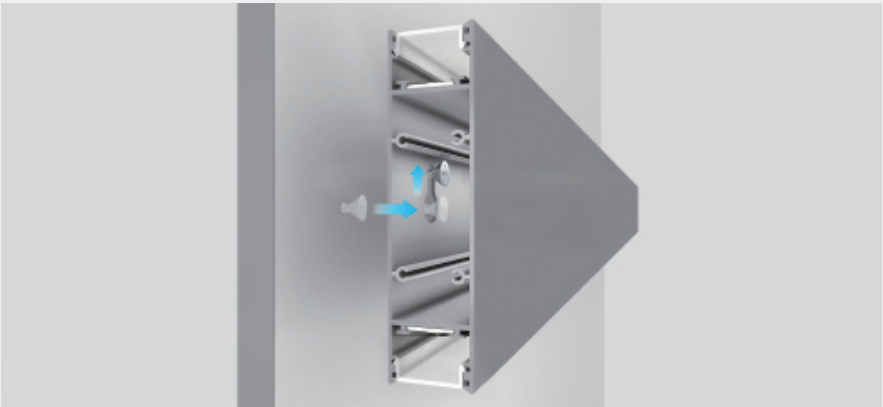


5 Wall mounted-LC25


Connection

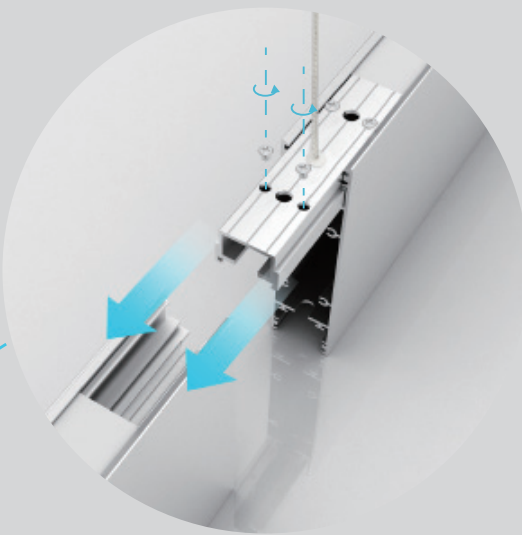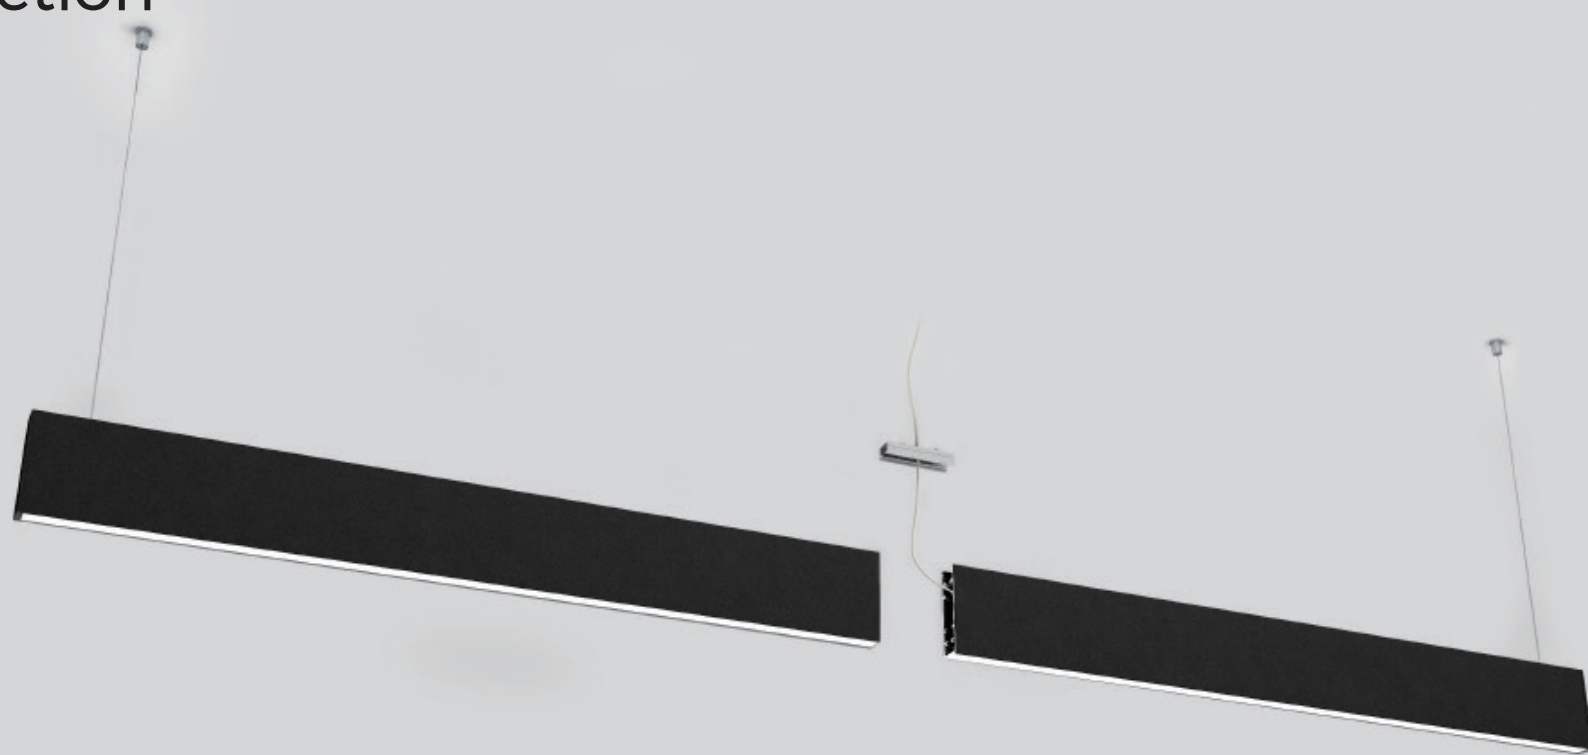

LH25
Connection
(without end cap)

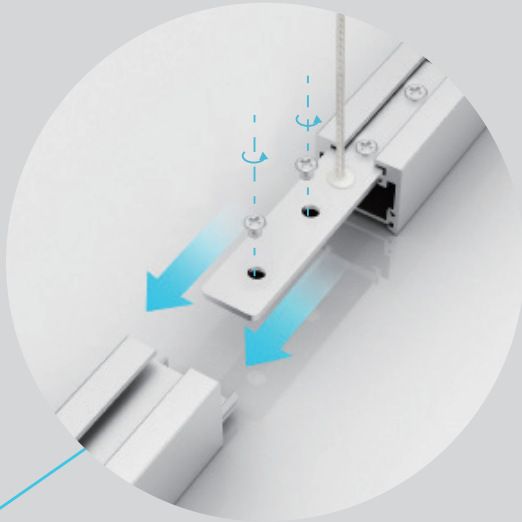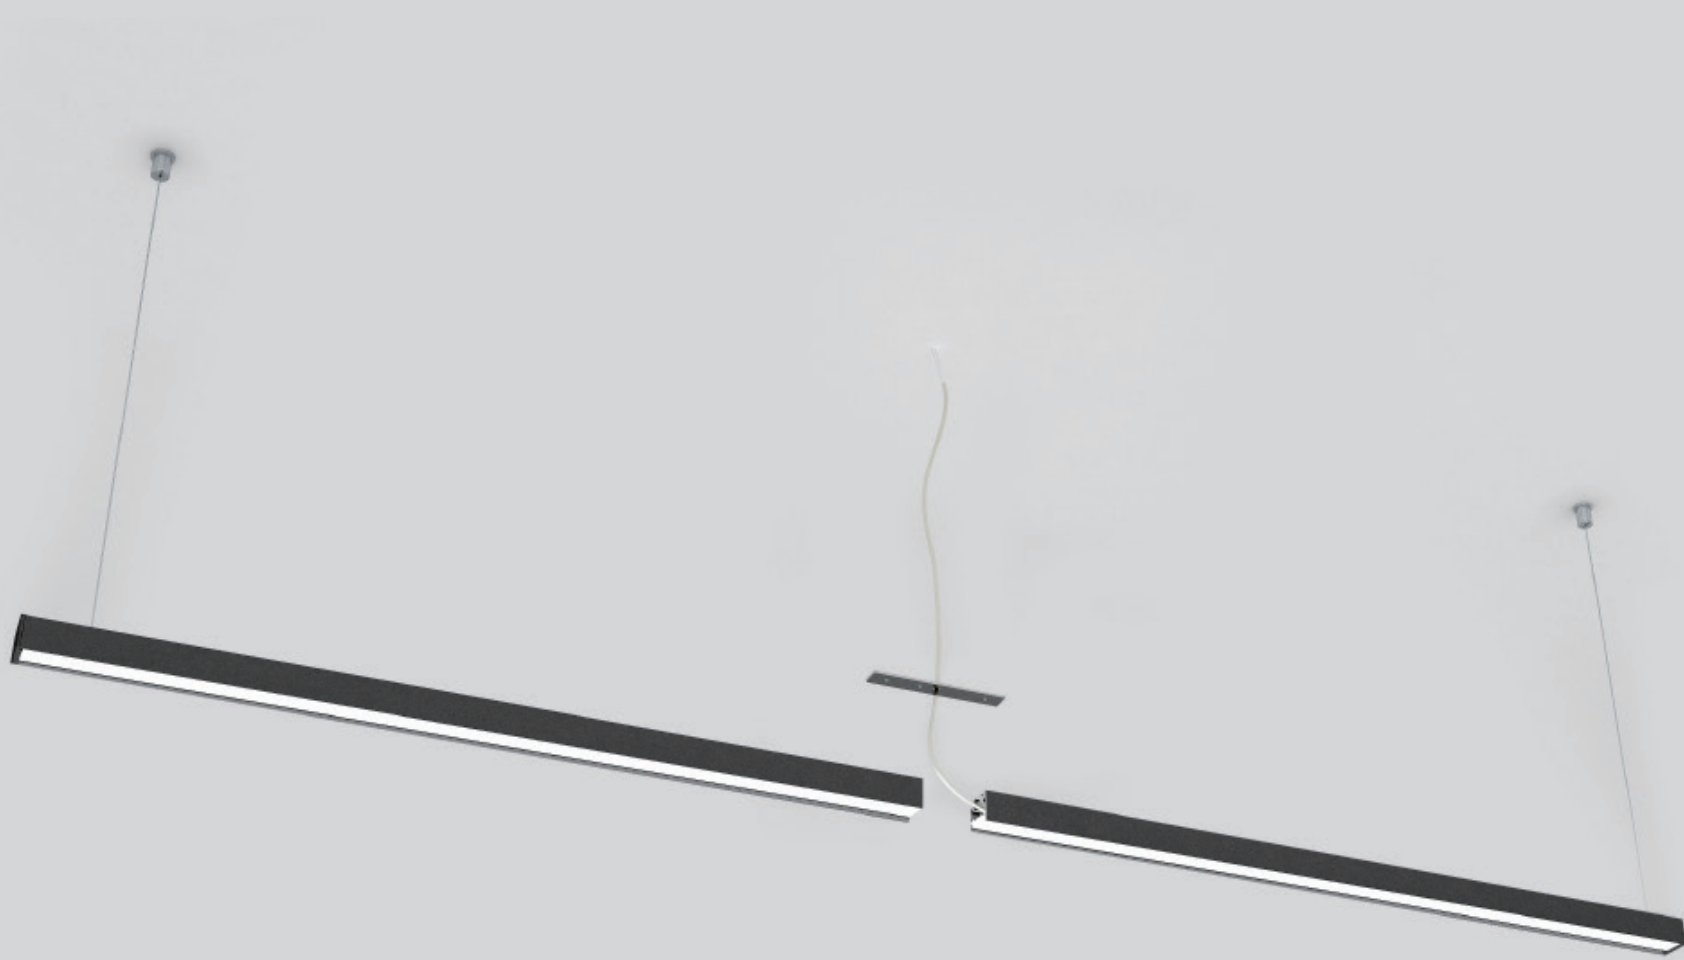


LS25/LM25/
LE25/LR25/TL25
Connection
(without end cap)
only for Diffuser and Prismatic

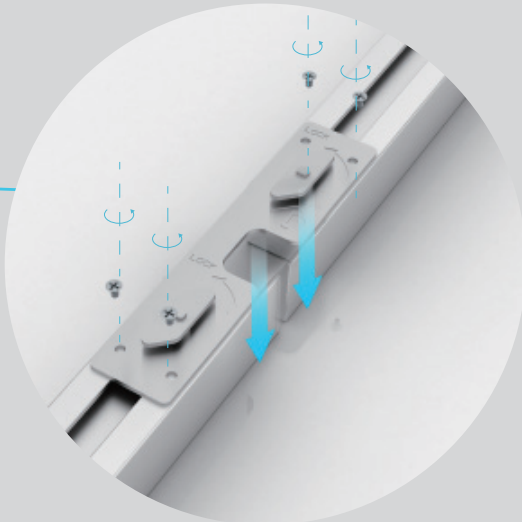

LS25
Connection
(with end cap)

Corners

LH25

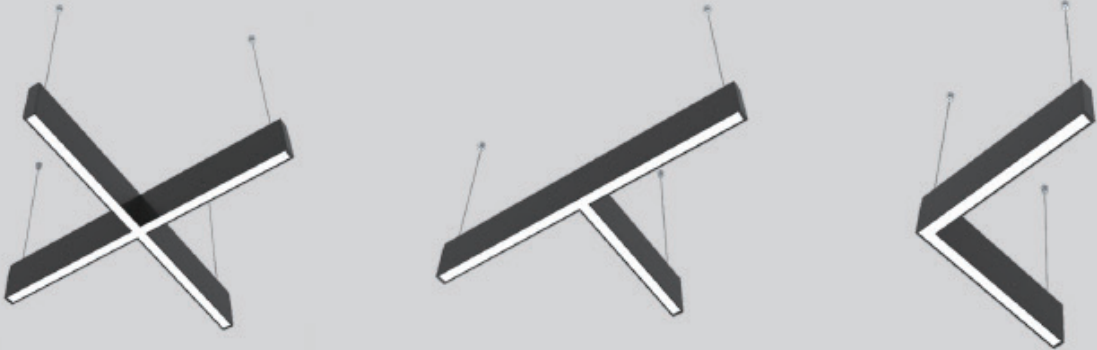


LS25



TL25/LM25




LE25

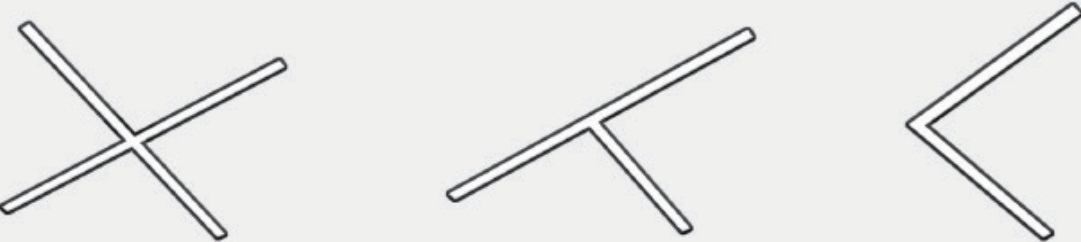

LH25 AC 220V
Standard luminaire

- Standard luminaire, Standard with Power box (built-in Constant current power supply) ,AC220V Plug-and-Play
- Support no dimming/0-10V/DALI dimming
- Up and down lighting design with suspension way , 25mm slender lighting surface .
- 100 Lm/w high light efficiency design,lumen output up to 3150Lm/m.
- A variety of light distribution optional (diffuser, prismatic, round grating 30°, round grating 55°) to meet the needs of various scenarios.
- Electric wire& suspension wire with two-in-one design, invisible and beautiful





Basic Parameters

Profile material AL6063-T5

Surface processing Spraying RAL9003 ☐
Spraying RAL9005 ☒ Anodizing


CCT 2700 K 3000 K 3500 K 4000 K 5000 K 6500 K

CRI Ra80/Ra90

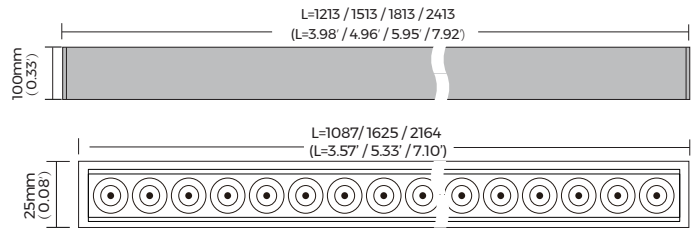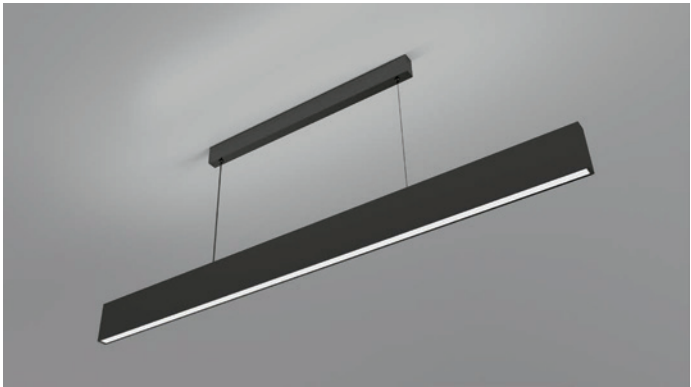

	1200mm	1500mm	1800mm	2400mm
Diffuser	Up: 19W /1700LM	Up: 23W/ 2100LM	Up: 28W /2600LM	Up: 38W /3600LM
	Down: 19W /1900 LM	Down: 23W /2300LM	Down: 28W /2800LM	Down: 38W /3800LM
Prismatic	Up: 19W /1700LM	Up: 23W/ 2100LM	Up: 28W /2600LM	Up: 38W /3600LM
	Down: 19W /1900 LM	Down: 23W /2300LM	Down: 28W /2800LM	Down: 38W /3800LM

	1100mm	1600mm	1800mm	2200mm
Grating 30°	Up: 16W /930LM	Up: 25W /1440LM	/	Up: 33W /1910LM
	Down: 16W /1640LM	Down: 25W /2570LM	/	Down: 33W /3390LM
Grating 60°	Up: 16W /930LM	Up: 25W /1450LM	/	Up: 33W /1920LM
	Down: 16W /1580LM	Down: 25W /2470LM	/	Down: 33W /3260LM

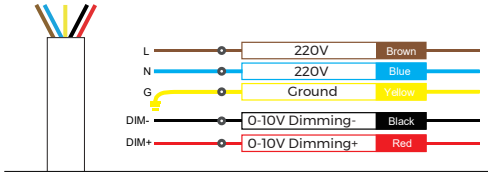

Ordering Code


Category	-	Series	Section Size	Diffuser Shape		Diffuser Nature		Carrier Style		Profile Color	End Cap Style	Length	Version	-	Light Source Type	Light Source Power		CCT		CRI		Power Type		-	Package		Label Type					
LLS	-	Pendant Lighting upward& downward	LH	25	Flat	F	Diffuser	D	NO Carrier	X	Silver	S	Holeless end cap	S	1100mm	/	-	Constant Current Rigid	T	32W	32	2700K	SW	>80	8	Support no dimming	N	-	COLORS Individual	D	COLORS	C
				Grating	G	Prismatic	P			White	W	1200mm	(A)				38W		38	3000K	WW	>90	9	0-10V	B			Customized	S			
						30°	F			Black	B	1500mm				46W	46		3500K	PW												
						55°	H					1600mm				50W	50		4000K	NW												
												1800mm				56W	56		5000K	DW												
													2200mm																			
													2400mm																			
LLS	-		LH	25		F	D		X		S		S	2400	-		T		76		NW		8		B	-		D		C		

Ordering luminaires kits



LS25 AC 220V
Standard luminaire

- Standard luminaire, Standard with Power box (built-in Constant current power supply) ,AC220V Plug-and-Play.
- Support no dimming/0-10V/DALI dimming.
- 25mm slender lighting surface.
- 100Lm/w high light efficiency design,lumen output up to 1700 Lm/m.
- A variety of light distribution optional (diffuser, prismatic, round grating 30°, round grating 55°, block frosted diffuser) to meet the needs of various scenarios.
- Electric wire& suspension wire with two-in-one design, invisible and beautiful.




Basic Parameters

Profile material	AL6063-T5		
Surface processing	Spraying RAL9003	☐	
	Spraying RAL9005	☒	
CCT	2700 K	3000 K	3500 K
	4000 K	5000 K	6500 K
CRI	Ra80/Ra90		

		1200mm	1500mm	1800mm	2400mm
Diffuser		20W /1870LM	29W /2340LM	38W /2800LM	46W /3740LM
Prismatic		20W /2000LM	29W /2500LM	38W /3000LM	46W /4000LM
Block frosted diffuser		20W /1830LM	29W /2290LM	38W /2750LM	46W /3660LM

		1100mm	1500mm	1800mm	2200mm
Grating 30°		16W /1650LM	25W /2580LM	/	33W /3300LM
Grating 55°		16W /1560LM	25W /2440LM	/	33W /3120LM

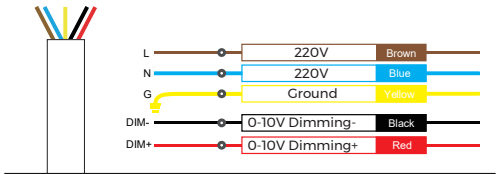

Ordering Code



Category	-	Series	Section Size	Diffuser Shape	Diffuser Nature	Carrier Style	Profile Color	End Cap Style	Length	Version	Light Source Type	Light Source Power	CCT	CRI	Power Type	Package	Label Type																
LLS	-	Pendant	LS	25	Flat	F	Diffuser D	NO Carrier	X	Silver	S	Holeless end cap	S	1100mm	/	-	Constant Current Rigid	T	16W	16	2700K	SW	>80	8	Support no dimming	N	-	COLORS Individual	D	COLORS	C		
					Grating	G	Prismatic P	Carrier	F	White	W			1200mm	(A)				20W	20	3000K	WW	>90	9	0-10V	B				Customized	S		
					Square	K	30°	F		Black	B			1500mm					25W	25	3500K	PW			DALI dimming	A							
				1600mm														30W	30	4000K	NW												
				1800mm														33W	33	5000K	DW												
				2200mm														40W	40	6500K	W												
				2400mm																													
LLS	-		LS	25	F	D	X	S	S	2400	-	T	46	NW	8	B	-	D		C													

Ordering luminaires kits LLS-LS25FDXSS2400-T40NW8B-DC



LC25 ⚡ AC 220V

- Up and down lighting design with wall mounted way , 25mm slender lighting surface.
- Support no dimming/0-10V/DALI dimming
- Germany brand PC diffuser with uniform and soft light output
- Built-in power , invisible and beautiful.

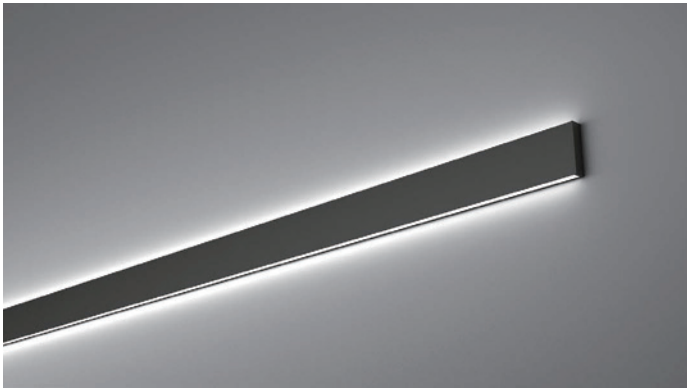


Basic Parameters

Profile material AL6063-T5


Surface processing Spraying RAL9003 ○ Anodizing

CCT

CRI Ra80/Ra90




	600mm	1200mm	1500mm	1800mm	2400mm
Diffuser 	Up: 7W/540LM Down: 7W/540LM	Up: 14W/1070LM Down: 14W/1070LM	Up: 19W/1340LM Down: 19W/1340LM	Up: 23W/1600LM Down: 23W/1600LM	Up: 29W/2140LM Down: 29W/2140LM

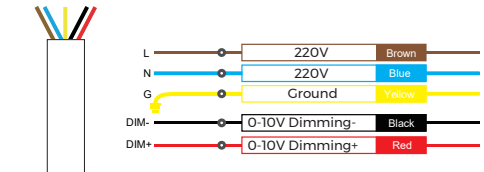**Ordering Code**


Category	-	Series	Section Size		Diffuser Shape	Diffuser Nature		Carrier Style		Profile Color	S	End Cap Style	S	Length	Version	-	Light Source Type	Light Source Power		CCT		CRI		Power Type		-	Package		Label Type				
LLS	-	Wall mounted Lighting upward& downward	LC	25	Flat	F	Diffuser	D	No Carrier	X	Silver	S	Holeless end cap	600mm	/	-	Constant Current Rigid	T	14W	14	2700K	SW	>80	8	Support no dimming	N	-	COLORS Individual	D	COLORS	C		
											White	W		1200mm	(A)			28W	28	3000K	WW	>90	9	0-10V DALI dimming		B						Customized	S
											Black	B		1500mm	39W			39	3500K	PW	A												
														1800mm	46W			46	4000K	NW													
														2400mm	58W			58	5000K	DW		6500K	W										
LLS	-		LC	25		F		D		X		S		S	2400	-		T		58		NW		8		B	-		D				

Ordering luminaires kits **LLS-LC25FDXSS2400-T58NW8B-DC**

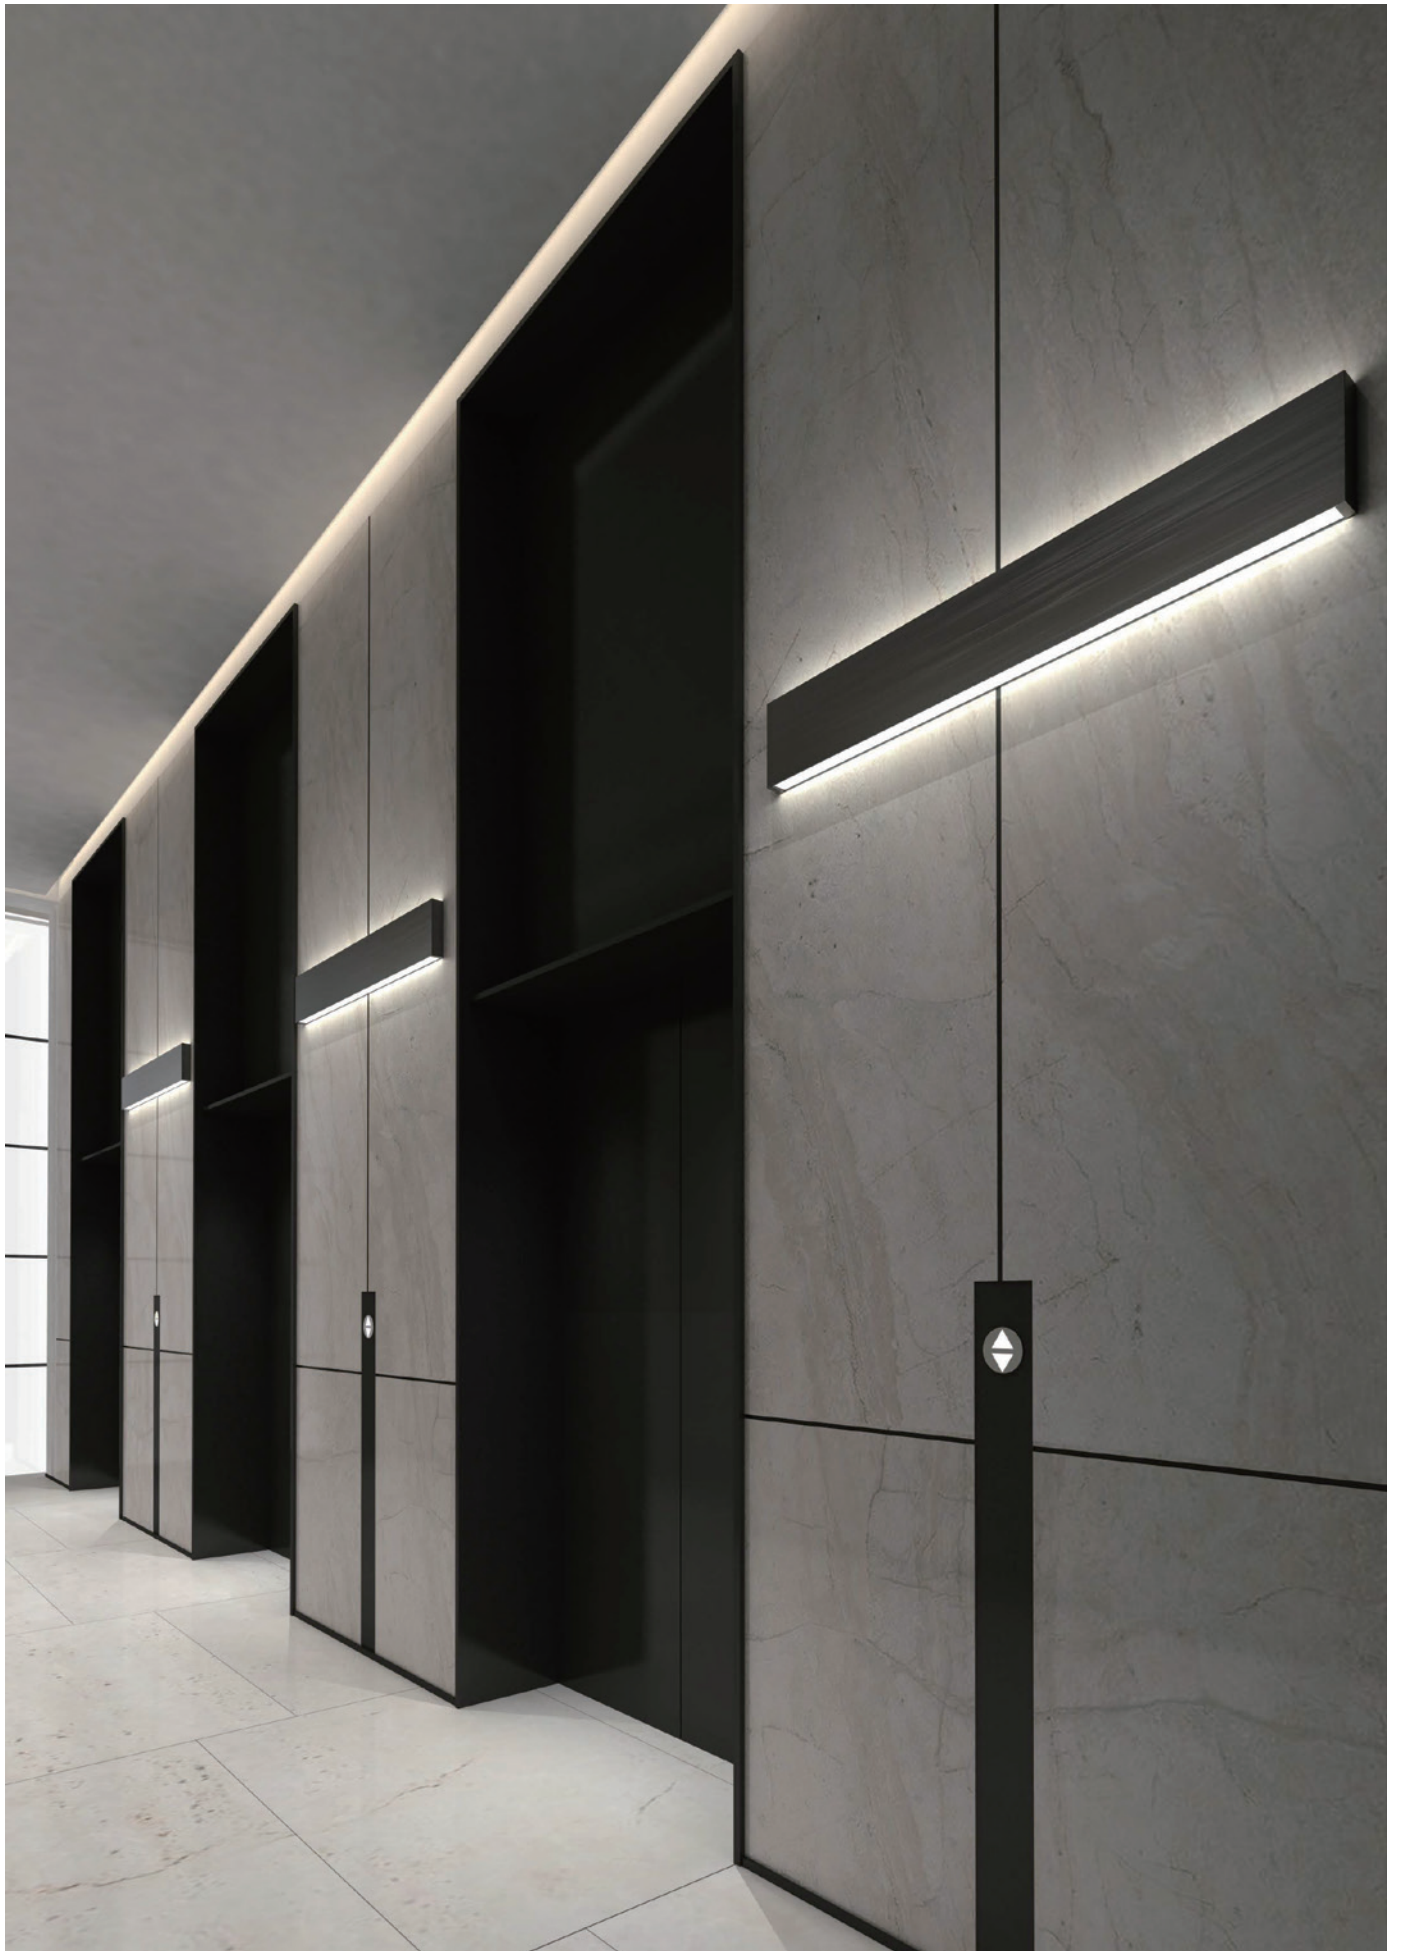



LH25 DC 24V

- Up and down lighting design with suspension way , 25mm slender lighting surface.
- 95lm/W high efficiency, the whole luminaire can reach 3800lm/m.
- Multiple standard corner (L type , X type , T type optional) available for free connection.
- A variety of light distribution optional (diffuser, prismatic, round grating 30°, round grating 55°) to meet the needs of various scenarios.
- Electric wire& suspension wire with two-in-one design, invisible and beautiful.



Basic Parameters

Profile material	AL6063-T5		
Surface processing	Spraying RAL9003		
	Spraying RAL9005 Anodizing		
CCT	2700 K	3000 K	3500 K
	4000 K	5000 K	6500 K
CRI	Ra80/Ra90		

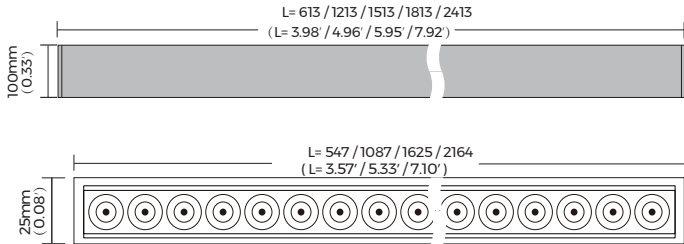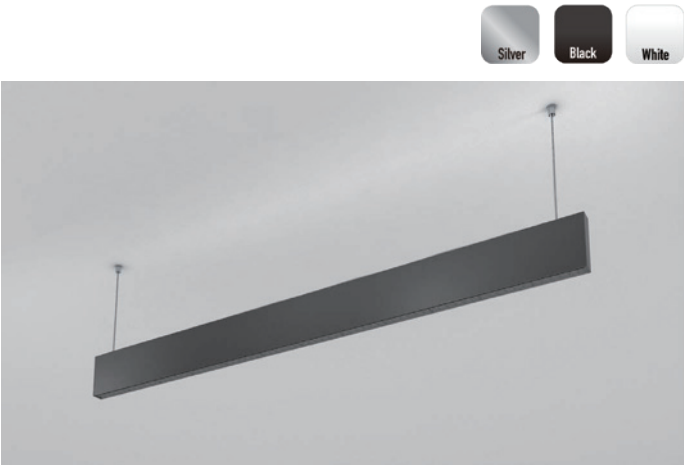

	600mm	1200mm	1500mm	1800mm	2400mm	L*(277*277mm)	T*(529*277mm)	X*(529*529mm)
Diffuser	Up: 12W/950LM Down: 12W/1250LM	Up: 24W/1900LM Down: 24W/2500LM	Up: 30W/2400LM Down: 30W/3150LM	Up: 36W/2900LM Down: 36W/3750LM	Up: 48W/3850LM Down: 48W/5000LM	Up: 11W/880LM Down: 11W/1155LM	Up: 16W/1280LM Down: 16W/1680LM	Up: 21W/1680LM Down: 21W/2205LM
	Up: 12W/950LM Down: 12W/1250LM	Up: 24W/1900LM Down: 24W/2500LM	Up: 30W/2400LM Down: 30W/3150LM	Up: 36W/2900LM Down: 36W/3750LM	Up: 48W/3850LM Down: 48W/5000LM	Up: 11W/880LM Down: 11W/1155LM	Up: 16W/1280LM Down: 16W/1680LM	Up: 21W/1680LM Down: 21W/2205LM
Blind cover	/	/	/	/	/	Available	Available	Available

	550mm	1100mm	1600mm	1800mm	2200mm	L*(277*277mm)	T*(529*277mm)	X*(529*529mm)
Round Grating 30/55°	Up: 10W/750LM Down: 10W/750LM	Up: 20W/1500LM Down: 20W/1500LM	Up: 30W/2250LM Down: 30W/2250LM	/	Up: 40W/3000LM Down: 40W/3000LM	/	/	/

Ordering Code

Category	-	Series	Section Size	Diffuser Shape	Diffuser Nature	Carrier Style	Profile Color	End Cap Style	Length	Version	-	Light Source Type	Light Source Power	CCT	CRI	Power Type	-	Package	Label Type													
LLS	-	Pendant Lighting upward& downward	LH	25	Flat	F	Diffuser	D	NO Carrier	X	Silver	S	Holeless end cap	S	550mm	/	-	24VDC flexible strip	F	40W/m	40	2700K	SW	>80	8	No Power	X	-	COLORS Individual	D	COLORS	C
					Grating	G	Prismatic	P					White	W			600mm	(A)		24VDC Rigid module	R			3000K	VW	>90	9				Customized	S
							30°	F					Black	B			1100mm							3500K	PW							
							55°	H									1200mm							4000K	NW							
																	1500mm							5000K	DW							
																	1600mm							6500K	W							
																	1800mm															
																	2200mm															
																	2400mm															
LLS	-		LH	25		F		D		X		S		S	2400	-		F		40		NW		8		X	-		D		C	


Ordering luminaires kits LLS-LH25FDXSS2400-F40NW8X-DC

Diffuser/Prismatic Z 30°/55 Blind cover


Standard length

500mm			2200mm
1100mm			1600mm
1600mm			1100mm
2200mm			550mm


Customized length (2400mm ~ 5000mm)



Ultra long connection (> 5000mm)




Corners

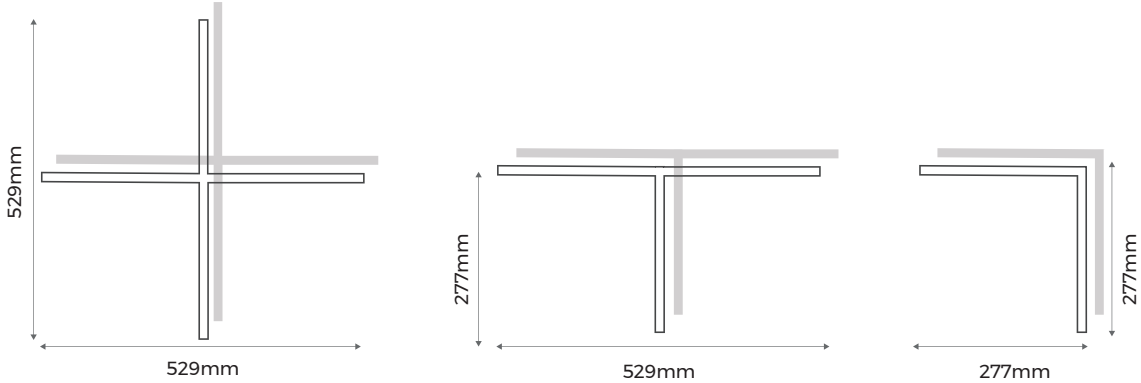

LS25 DC 24V

- 25mm slender lighting surface.
- 105 Lm/w high light efficiency design , lumen output up to 2100 Lm/m.
- Multiple standard corner (L type , X type , T type optional) available for free connection.
- A variety of light distribution optional (diffuser, prismatic, round grating 30°, round grating 55°, block frosted diffuser) to meet the needs of various scenarios.
- Electric wire& suspension wire with two-in-one design, invisible and beautiful.



Basic Parameters

Profile material	AL6063-T5		
Surface processing	Spraying RAL9003 ☐		
	Spraying RAL9005 ☒ Anodizing		
CCT	2700 K 3000 K 3500 K 4000 K 5000 K 6500 K		
CRI	Ra80/Ra90		



		600mm	1200mm	1500mm	1800mm	2400mm	L*(277*277mm)	T*(529*277mm)	X*(529*529mm)
Diffuser		12W /1250LM	24W /2500LM	30W /3150LM	36W /3750LM	48W /5000LM	11W /1155LM	16W /1680LM	21W /2205LM
Prismatic		12W /1250LM	24W /2500LM	30W /3150LM	36W /3750LM	48W /5000LM	11W /1155LM	16W /1680LM	21W /2205LM
Block frosted diffuser		12W /1200LM	24W /2400LM	30W /3000LM	36W /3600LM	48W /4800LM	/	/	/
Blind cover		/	/	/	/	/	Available	Available	Available

	550mm	1100mm	1600mm	1800mm	2200mm	L*(277*277mm)	T*(529*277mm)	X*(529*529mm)
Round Grating 30/55°		11W/850LM	22W/1700LM	33W/2550LM	/	44W/3400LM	/	/

Ordering Code



Category	-	Series	Section Size	Diffuser Shape	Diffuser Nature	Carrier Style	Profile Color	End Cap Style	Length	Version	-	Light Source Type	Light Source Power	CCT	CRI	Power Type	-	Package	Label Type														
LLS	-	Pendant	LS	25	Flat	F	Diffuser	D	NO Carrier	X	Silver	S	Holeless end cap	S	550mm	/	-	24VDC flexible strip	F	20W/m	20	2700K	SW	>80	8	No Power	X	-	COLORS Individual	D	COLORS	C	
					Grating	G	Prismatic	P	Carrier	F	White	W			600mm	(A)		24VDC Rigid module	R				3000K	WW	>90	9					Customized	S	
					Square	K	30°	F		Black	B			1100mm									3500K	PW									
														1200mm									4000K	NW									
														1500mm									5000K	DW									
														1600mm																			
														1800mm									6500K	W									
														2200mm																			
														2400mm																			
LLS	-		LS	25	F		D		X		S		S	2400	-			F		20		NW		8		X	-		D		C		

Ordering luminaires kits LLS-LS25FDXSS2400-F20NW8X-DC




Diffuser/Prismatic/Block frosted diffuser Round grating 30°/55 Blind cover

Standard length		
600mm		2200mm
1200mm		1600mm
1500mm		1100mm
1800mm		550mm
2400mm		
600mm		
1200mm		
1500mm		
1800mm		
2400mm		

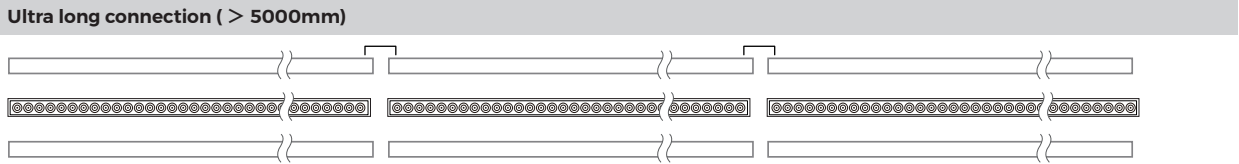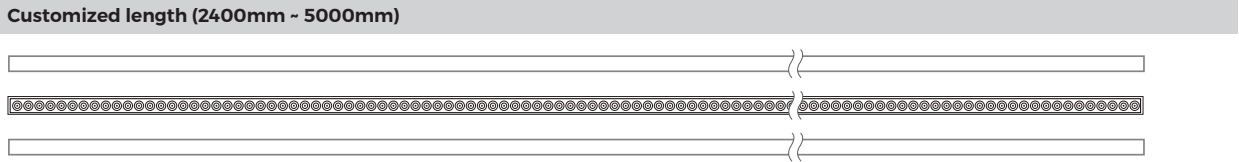


Corners

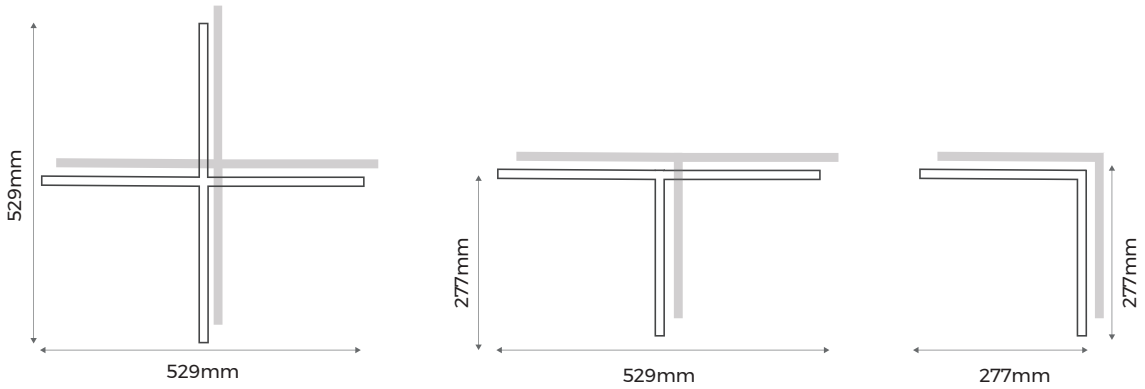



LM25 DC 24V

- 25mm slender lighting surface .
- 120 Lm/w high light efficiency design , lumen output up to 2375 Lm/m .
- Multiple standard corner (L type , X type , T type optional) available for free connection .
- A variety of light distribution optional (diffuser, prismatic, round grating 30°, round grating 55°, asymmetric, double asymmetric) to meet the needs of various scenarios.
- Provide surface mounted buckle , more convenient installation .



Basic Parameters

Profile material	AL6063-T5		
Surface processing	Spraying RAL9003 ☐		
	Spraying RAL9005 ☒ Anodizing		
CCT	2700 K 3000 K 3500 K 4000 K 5000 K 6500 K		
CRI	Ra80/Ra90		



		200mm	600mm	1200mm	1500mm	1800mm	2400mm	L*(277*277mm)	T*(529*277mm)	X*(529*529mm)
Diffuser		/	12W/1250LM	24W/2500LM	30W/3150LM	36W/3750LM	48W/5000LM	11W/1155LM	16W/1680LM	21W/2205LM
Prismatic		/	12W/1250LM	24W/2500LM	30W/3150LM	36W/3750LM	48W/5000LM	11W/1155LM	16W/1680LM	21W/2205LM
Block frosted diffuser		/	12W/1200LM	24W/2400LM	30W/3000LM	36W/3600LM	48W/4800LM	/	/	/
Asymmetric		6W/710LM	12W/1425LM	24W/2850LM	30W/3560LM	36W/4275LM	48W/5700LM	/	/	/
Double asymmetric		6W/710LM	12W/1420LM	24W/2840LM	30W/3550LM	36W/4260LM	48W/5680LM	/	/	/
Blind cover		/	/	/	/	/	/	Available	Available	Available

		200mm	550mm	1100mm	1600mm	1800mm	2200mm	L*(277*277mm)	T*(529*277mm)	X*(529*529mm)
Round Grating 30/55°		/	11W/850LM	22W/1700LM	33W/2550LM	/	44W/3400LM	/	/	/

Ordering Code

Category	-	Series	Section Size	Diffuser Shape	Diffuser Nature	Carrier Style	Profile Color	End Cap Style	Length	Version	-	Light Source Type	Light Source Power	CCT	CRI	Power Type	-	Package	Label Type													
LLS	-	Surface mounted	LM	25	Flat	F	Diffuser	D	NO Carrier	X	Silver	S	Holeless end cap	S	200mm	/	-	24VDC flexible strip	F	20W/m	20	2700K	SW	>80	8	No Power	X	-	COLORS Individual	D	COLORS	C
					Grating	G	Prismatic	P	Flat	X	White	W			550mm	(A)		24VDC Rigid module	R			3000K	WW	>90	9					Customized	S	
					Square	K	30°	F			Black	B			600mm							3500K	PW									
					Lens	L	55°	H							1100mm							4000K	NW									
															1200mm							5000K	DW									
															1500mm							6500K	W									
															1600mm																	
1800mm																																
2200mm																																
2400mm																																
LLS	-		LM	25		F		D		X		S		S	2400	-		F		20		NW		8		X	-		D		C	

Ordering luminaires kits LLS-LM25FDXSS2400-F20NW8X-DC

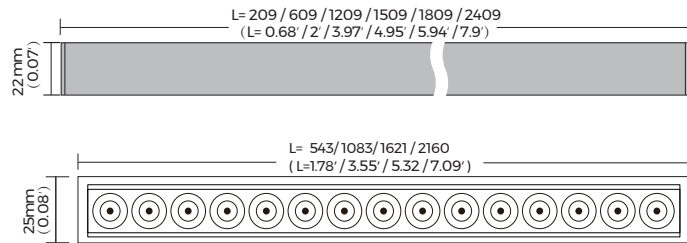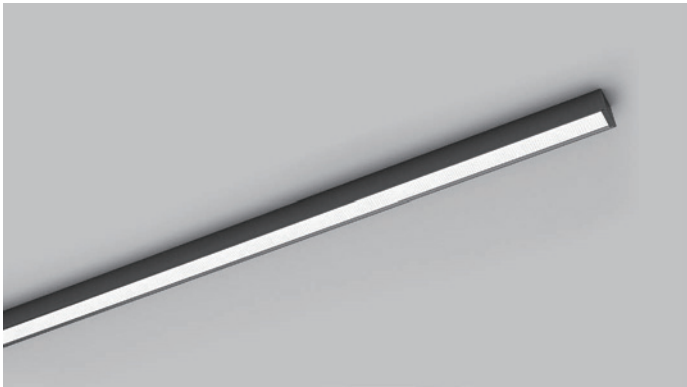


Diffuser/Prismatic Round grating 30°/55 Asymmetric / Double asymmetric Block frosted diffuser Blind cover


Standard length

600mm			2200mm
1200mm			1600mm
1500mm			1100mm
1800mm			550mm
2400mm			
600mm			2400mm
1200mm			1800mm
1500mm			1500mm
1800mm			1200mm
2400mm			600mm
			190mm


Customized length (2400mm ~ 5000mm)

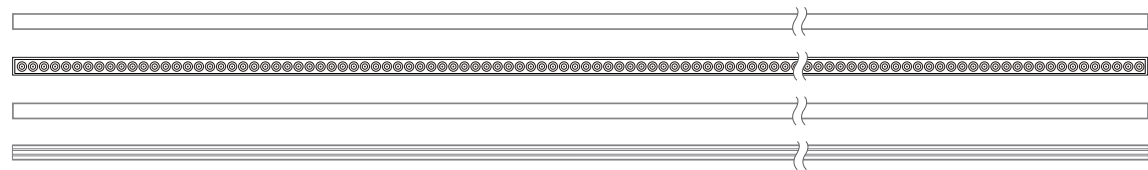

Ultra long connection (> 5000mm)

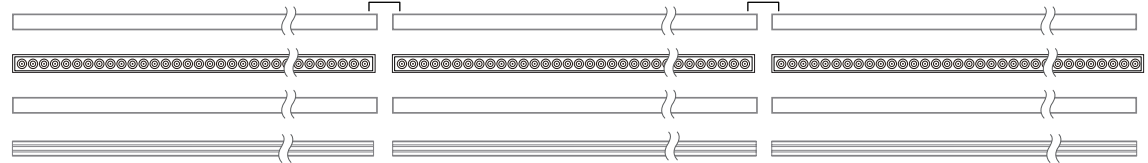


Corners

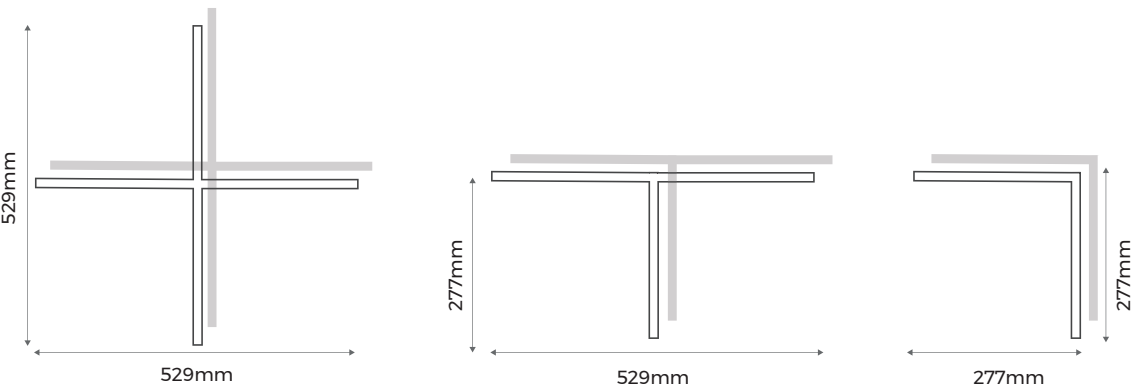

LE25 DC 24V

- 25mm slender lighting surface .
- 120 Lm/w high light efficiency design , lumen output up to 2375 Lm/m .
- A variety of light distribution optional (diffuser, prismatic, round grating 30°, round grating 55°, asymmetric, double asymmetric) to meet the needs of various scenarios.
- Butterfly clip design , more convenient installation .



Basic Parameters

Profile material	AL6063-T5				
Surface processing	Spraying RAL9003		○	Anodizing	
	Spraying RAL9005		●		
CCT	2700 K 3000 K 3500 K 4000 K 5000 K 6500 K				
CRI	Ra80/Ra90				



		200mm	600mm	1200mm	1500mm	1800mm	2400mm	L*(277*277mm)	T*(529*277mm)	X*(529*529mm)
Diffuser		4W / 400LM	12W / 1250LM	24W / 2500LM	30W / 3150LM	36W / 3750LM	48W / 5000LM	11W / 1155LM	16W / 1680LM	21W / 2205LM
Prismatic		4W / 400LM	12W / 1250LM	24W / 2500LM	30W / 3150LM	36W / 3750LM	48W / 5000LM	11W / 1155LM	16W / 1680LM	21W / 2205LM
Asymmetric		6W / 712LM	12W / 1425LM	24W / 2850LM	30W / 3562LM	36W / 4275LM	48W / 5700LM	/	/	/
Double asymmetric		6W / 712LM	12W / 1425LM	24W / 2850LM	30W / 3562LM	36W / 4275LM	48W / 5700LM	/	/	/
Blind cover		/	/	/	/	/	/	Available	Available	Available

		200mm	500mm	1100mm	1600mm	1800mm	2200mm	L*(277*277mm)	T*(529*277mm)	X*(529*529mm)
Round Grating 30/55°		/	11W/850LM	22W/1700LM	33W/2550LM	/	44W/3400LM	/	/	/

Ordering Code

Category	-	Series	Section Size	Diffuser Shape	Diffuser Nature	Carrier Style	Profile Color	End Cap Style	Length	Version	-	Light Source Type	Light Source Power	CCT	CRI	Power Type	-	Package	Label Type												
LLS	-	Recessed	LE	25	Flat	F	Diffuser D	NO Carrier	X	Silver	S	Holeless end cap	S	200mm	/	-	24VDC flexible strip	F	20W/m	20	2700K	SW	>80	8	No Power	X	-	COLORS Individual	D	COLORS	C
					Grating	G	Prismatic P	Flat	F	White	W			550mm	(A)		24VDC Rigid module	R			3000K	WW	>90	9					Customized	S	
					Lens	L	30°	F		Black	B			600mm							3500K	PW									
														1100mm							4000K	NW									
														1200mm							5000K	DW									
														1500mm							6500K	W									
														1600mm																	
														1800mm																	
														2200mm																	
														2400mm																	
LLS	-		LE	25		F	D		X	S		S	2400	-	F	20	NW	8	X	-		D	C								

Ordering luminaires kits LLS-LE25FDXSS2400-F20NW8X-DC

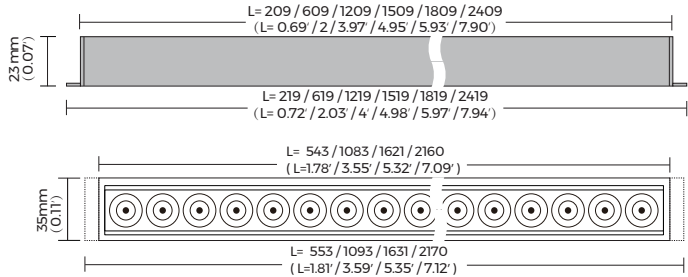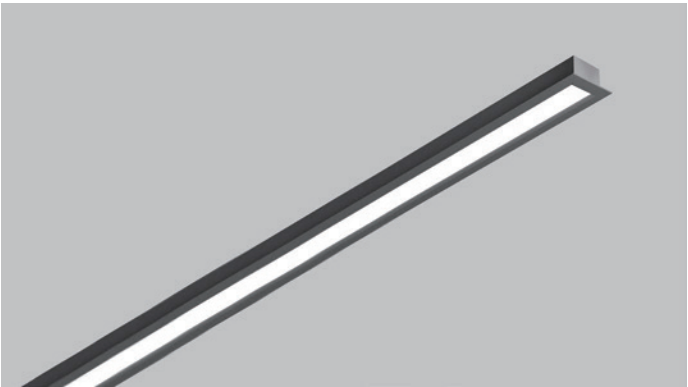


Diffuser/Prismatic Round grating 30°/55 Asymmetric / Double asymmetric Blind cover


Standard length

190mm			2200mm
600mm			1600mm
1200mm			1100mm
1500mm			550mm
1800mm			
2400mm			
190mm			
600mm			
1200mm			
1500mm			
1800mm			
2400mm			


Customized length (2400mm ~ 5000mm)



Ultra long connection (> 5000mm)

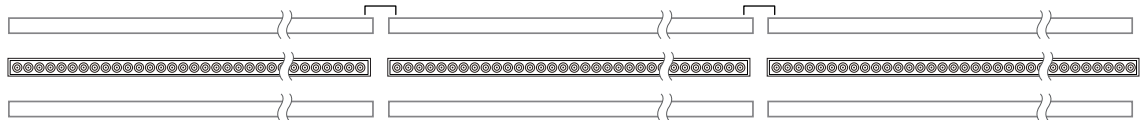


Corners

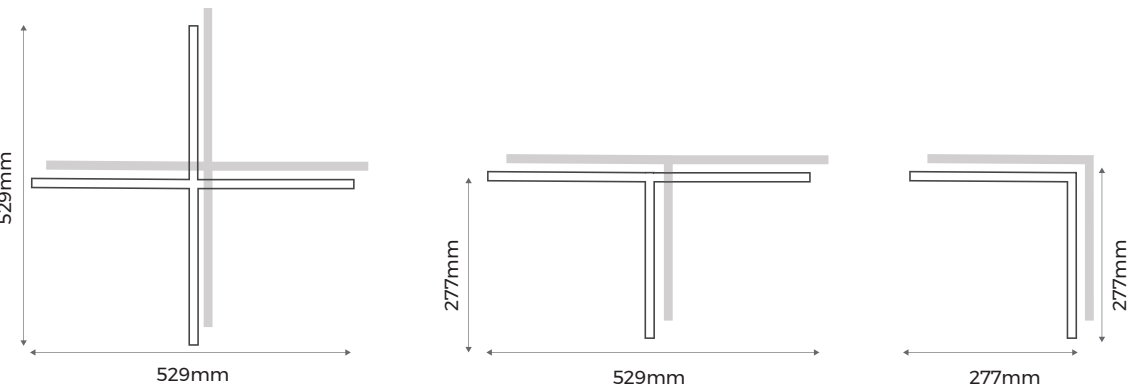

LR25 DC 24V

- 25mm slender lighting surface.
- 120 Lm/w high light efficiency design , lumen output up to 2375 Lm/m.
- A variety of light distribution optional (diffuser, prismatic, round grating 30°, round grating 55°, asymmetric, black mask) to meet the needs of various scenarios.
- Rimless recessed design.



Basic Parameters

Profile material	AL6063-T5		
Surface processing	Spraying RAL9003 ☐		
	Spraying RAL9005 ☒ Anodizing		
CCT	2700 K 3000 K 3500 K 4000 K 5000 K 6500 K		
CRI	Ra80/Ra90		


	200mm	600mm	1200mm	1500mm	1800mm	2400mm
Diffuser	4W / 400LM	12W / 1250LM	24W / 2500LM	30W / 3150LM	36W / 3750LM	48W / 5000LM
Prismatic	4W / 400LM	12W / 1250LM	24W / 2500LM	30W / 3150LM	36W / 3750LM	48W / 5000LM
Asymmetric	6W / 710LM	12W / 1425LM	24W / 2850LM	30W / 3560LM	36W / 4275LM	48W / 5700LM
Double asymmetric	6W / 710LM	12W / 1425LM	24W / 2850LM	30W / 3560LM	36W / 4275LM	48W / 5700LM
Blind cover		/	/	/	/	/

	200mm	550mm	1100mm	1600mm	1800mm	2200mm
Round Grating 30/55° 	/	11W/850LM	22W/1700LM	33W/2550LM	/	44W/3400LM

Ordering Code

Category	-	Series	Section Size		Diffuser Shape		Diffuser Nature		Carrier Style		Profile Color		End Cap Style		Length	Version	-	Light Source Type		Light Source Power		CCT		CRI		Power Type		-	Package		Label Type		
LLS	-	Trimless Recessed	LR	25	Flat	F	Diffuser	D	NO Carrier	X	Silver	S	Holeless end cap	S	200mm	/	-	24VDC flexible strip	F	20W/m	20	2700K	SW	>80	8	No Power	X	-	COLORS Individual	D	COLORS	C	
					Grating	G	Prismatic	P	Flat	F	White	W			550mm	(A)	24VDC Rigid module	R		3000K	WW	>90	9								Customized	S	
					Lens	L	30°	F			Black	B			600mm					1100mm					3500K	PW							
							55°	H							1200mm					1500mm					4000K	NW							
							Asym-metric	A							1600mm					1800mm					5000K	DW							
							double polarized light	S							2200mm					2400mm					6500K	W							
					LLS	-		LR	25		F	D		X		S		S	2400	-		F		20		NW		8		X	-		D

Ordering luminaires kits LLS-LR25FDXSS2400-F20NW8X-DC

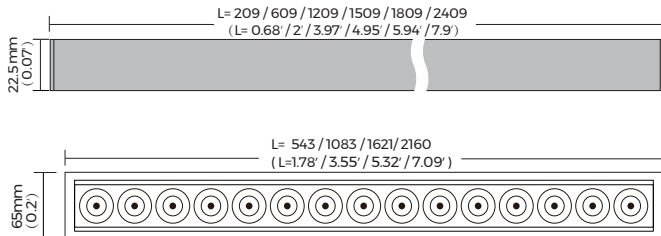


Diffuser/Prismatic Round grating 30°/55 Asymmetric Black Diffuser


Standard length

190mm			2200mm
600mm			1600mm
1200mm			1100mm
1500mm			550mm
1800mm			
2400mm			
190mm			
600mm			
1200mm			
1500mm			
1800mm			
2400mm			


Customized length (2400mm ~ 5000mm)

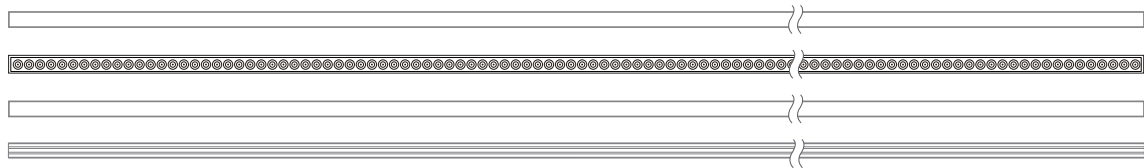

Ultra long connection (> 5000mm)

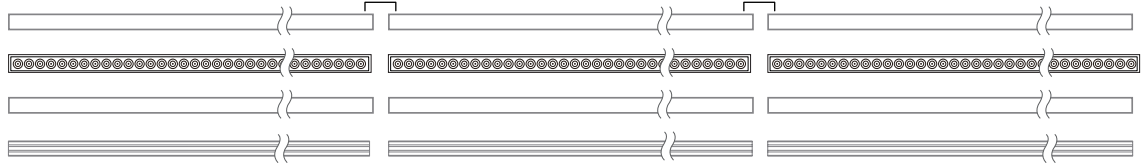


Corners

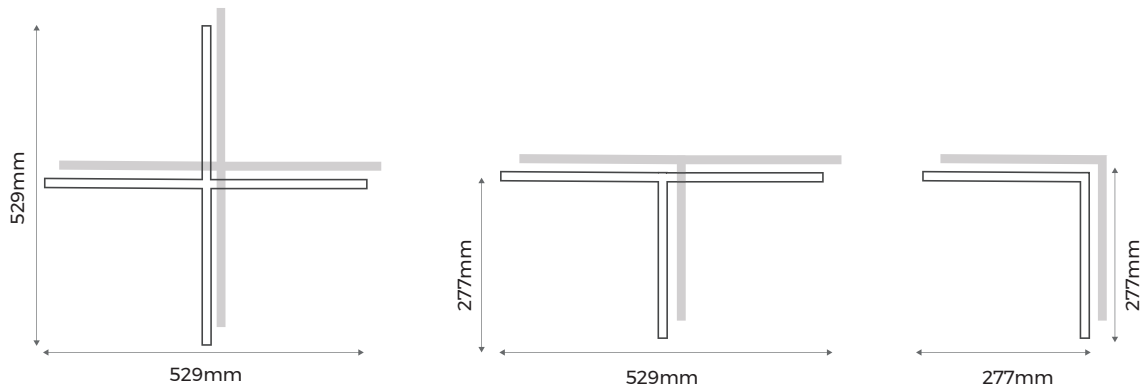

TL25 DC 24V

- 25mm slender lighting surface .
- 120 Lm/w high light efficiency design , lumen output up to 2375 Lm/m .
- Multiple standard corner (L type , X type , T type optional) available for free connection .
- A variety of light distribution optional (diffuser, prismatic, round grating 30°, round grating 55°) to meet the needs of various scenarios.
- Adapt to 15/16" T-BAR ceiling system , more convenient installation .



Basic Parameters

Profile material	AL6063-T5				
Surface processing	Spraying RAL9003		☐		
	Spraying RAL9005		☒ Anodizing		
CCT	2700K 3000K 3500K 4000K 5000K 6500K				
CRI	Ra80/Ra90				



		200mm	600mm	1200mm	1500mm	1800mm	2400mm	L*(277*277mm)	T*(529*277mm)	X*(529*529mm)
Diffuser		/	12W/1250LM	24W/2500LM	30W/3125LM	36W/3745LM	48W/5000LM	11W/1155LM	16W/1680LM	21W/2205LM
Prismatic		/	12W/1250LM	24W/2500LM	30W/3125LM	36W/3740LM	48W/5000LM	11W/1155LM	16W/1680LM	21W/2205LM
Block frosted diffuser		/	12W/1175LM	24W/2350LM	30W/2940LM	36W/3525LM	48W/4700LM	/	/	/
Asymmetric		/	12W/1425LM	24W/2850LM	30W/3560LM	36W/4275LM	48W/5700LM	/	/	/
Double asymmetric		/	12W/1420LM	24W/2840LM	30W/3550LM	36W/4260LM	48W/5680LM	/	/	/
Blind cover		/	/	/	/	/	/	Available	Available	Available

		550mm	1100mm	1600mm	1800mm	2200mm	L*(277*277mm)	T*(529*277mm)	X*(529*529mm)
Round Grating 30/55°		11W/860LM	22W/1720LM	33W/2580LM	/	44W/3440LM	/	/	/

Ordering Code

Category	-	Series	Section Size	Diffuser Shape	Diffuser Nature	Carrier Style	Profile Color	End Cap Style	Length	Version	-	Light Source Type	Light Source Power	CCT	CRI	Power Type	-	Package	Label Type															
LLS	-	T-bar	TL	25	Flat	F	Diffuser	D	NO Carrier	X	Silver	S	Holeless end cap	S	550mm	/	-	24VDC flexible strip	F	20W/m	20	2700K	SW	>80	8	No Power	X	-	COLORS Individual	D	COLORS	C		
					Grating	G	Prismatic	P	Flat	X	White	W	600mm	(A)	24VDC Rigid module	R	3000K	WW	>90	9			Customized	S										
					Square	K	30°	F			Black	B	1100mm				3500K	PW																
					Lens	L	55°	H	Asymmetric	A	1200mm				1500mm																			
											1600mm				1800mm																			
											2200mm				2400mm																			
					LLS	-		TL	25		F	D		X	S		S	2400	-		F		20		NW		8		X	-		D		C

Ordering luminaires kits

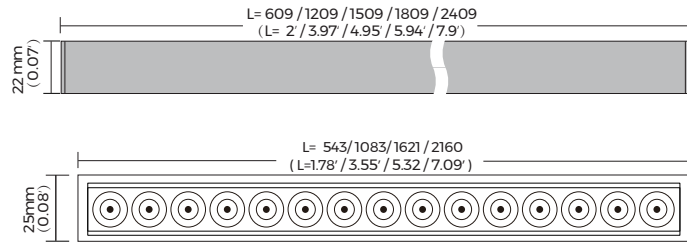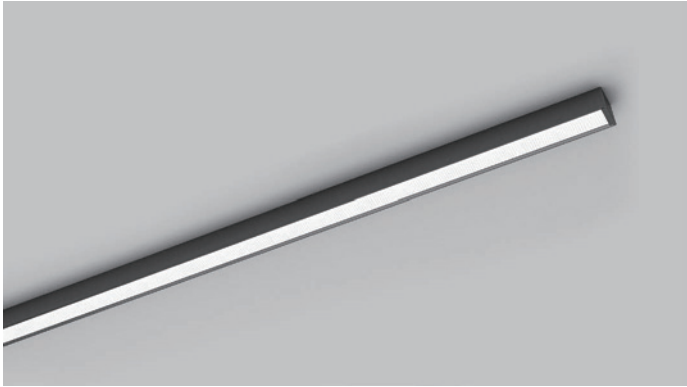


Diffuser/Prismatic Round grating 30°/55 Asymmetric / Double asymmetric Block frosted diffuser Blind cover

Standard length


600mm		2200mm
1200mm		1600mm
1500mm		1100mm
1800mm		550mm
2400mm		

600mm		2400mm
1200mm		1800mm
1500mm		1500mm
1800mm		1200mm
2400mm		600mm
		190mm


Customized length (2400mm - 5000mm)

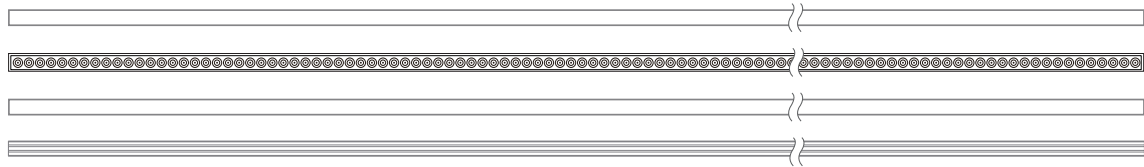

Ultra long connection (> 5000mm)

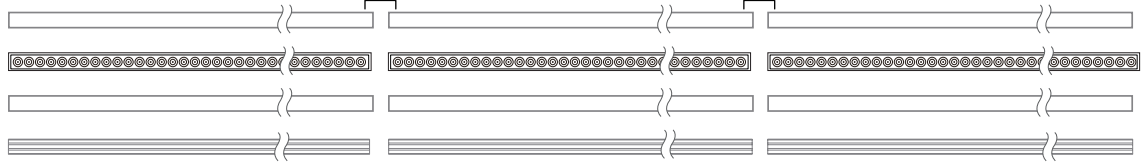


Corners

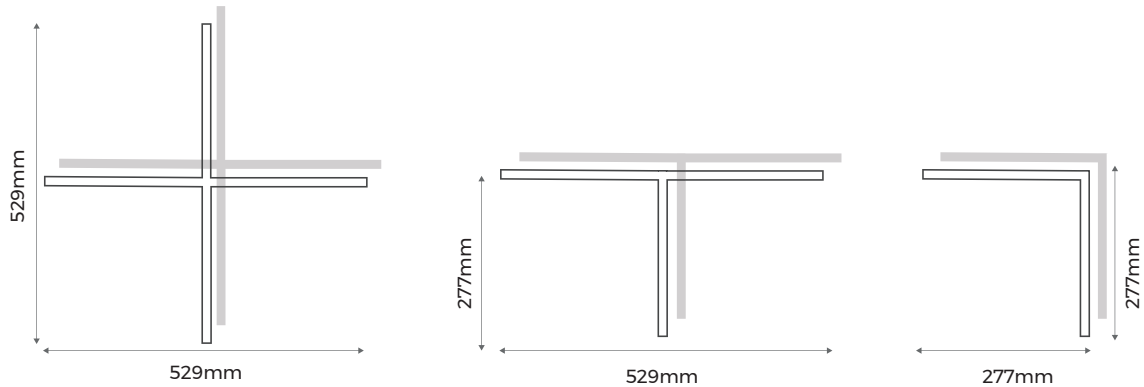

80
LM/W

1100
LM/M

High lumen output
High lighting efficiency

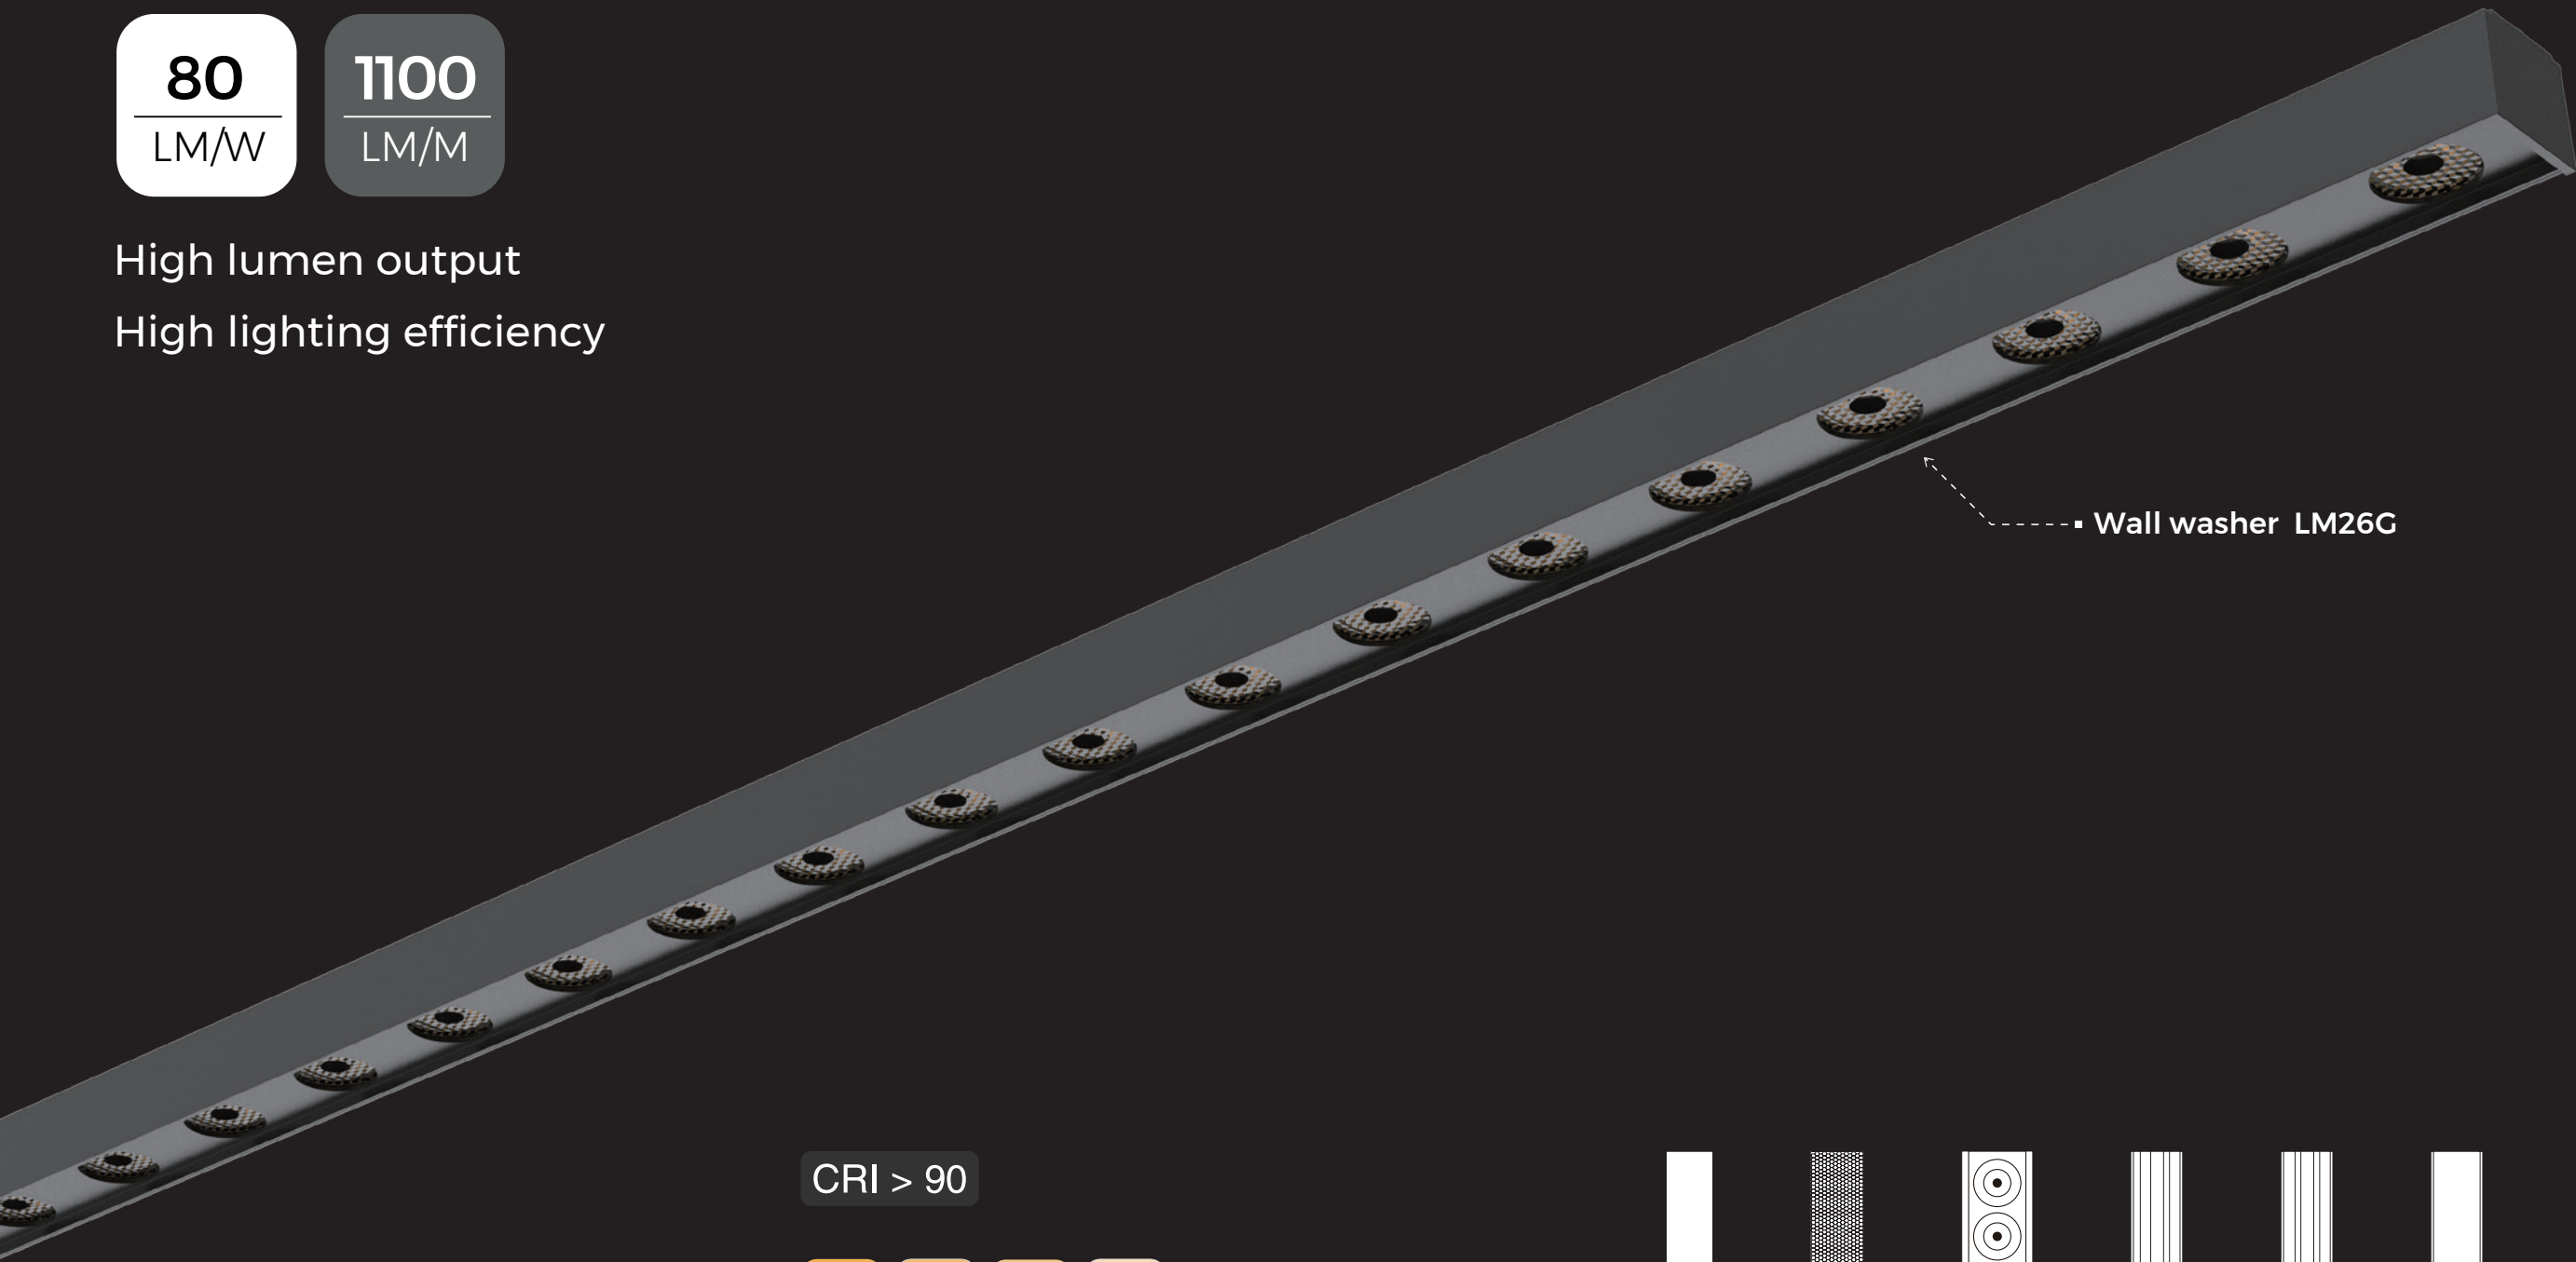

CRI > 90

2700 K 3000 K 3500 K 4000 K

1
BIN
ONLY

3
SDCM≤3

Same
Forever

LM-85


Diffuser	Microprism	Round Grating (30°/55°)	Asymmetric	Double asymmetric	Block frosted diffuser	Wall washer	Wall washer (25°) (15°x40°)
105LM/W	105LM/W	85LM/W	120LM/W	120LM/W	100LM/W	85LM/W	85LM/W

*Base on CRI80 4000K

80
LM/W

1100
LM/M

High lumen output
High lighting efficiency

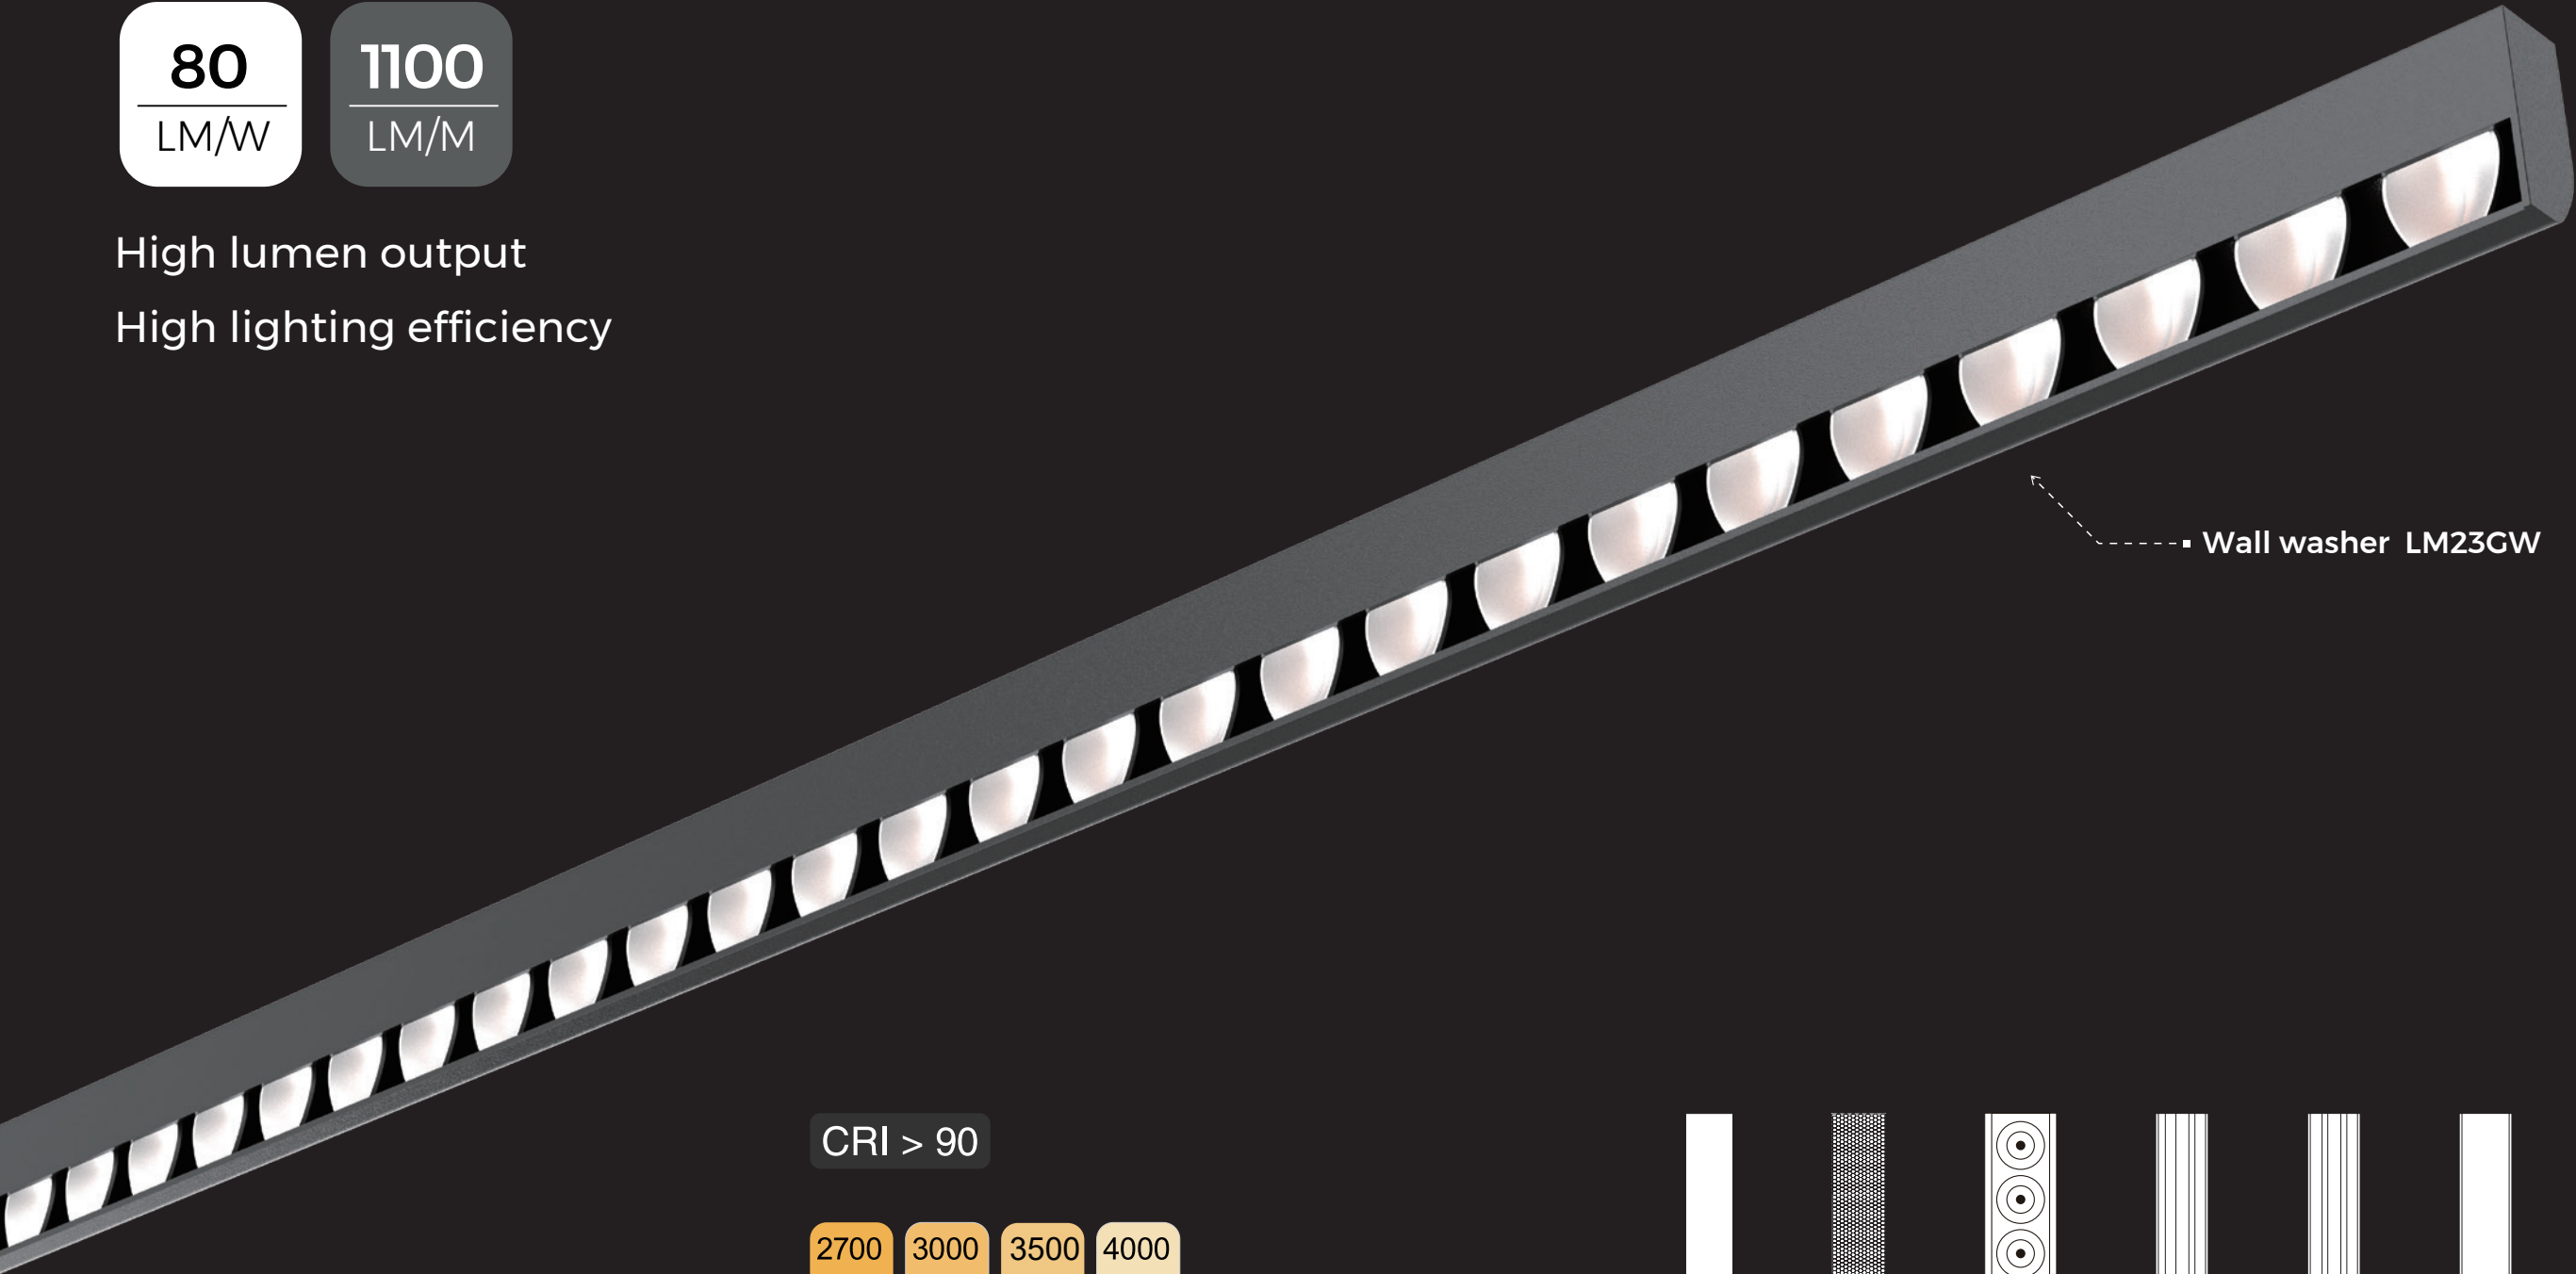

CRI > 90

2700 K 3000 K 3500 K 4000 K



1
BIN
ONLY



3
SDCM≤3



Same
Forever

LM-85

							
Diffuser	Microprism	Round Grating (30°/55°)	Asymmetric	Double asymmetric	Block frosted diffuser	Wall washer	Wall washer (25°) (15°x40°)
105LM/W	105LM/W	85LM/W	120LM/W	120LM/W	100LM/W	85LM/W	85LM/W

*Base on CRI80 4000K

LLS-LM26


- 26mm slender lighting surface .
- 80Lm/w high light efficiency design , lumen output up to 1100 Lm/m .
- Multiple standard corner (L type , X type , T type optional) available for free connection .
- A variety of light distribution optional (diffuser, prismatic, round grating 15°x40° , round grating 25°) to meet the needs of various scenarios.



Basic Parameters

Profile material	AL6063-T5
Surface processing	Spraying RAL9003 ☐ Spraying RAL9005 ☒ Anodizing
CCT	2700K3000K3500K4000K
CRI	Ra90

			600mm	1200mm	1800mm
Grating		15°x40°	14W/1120LM	28W/2240LM	42W/3360LM
Prismatic		25°	14W/1120LM	28W/2240LM	42W/3360LM

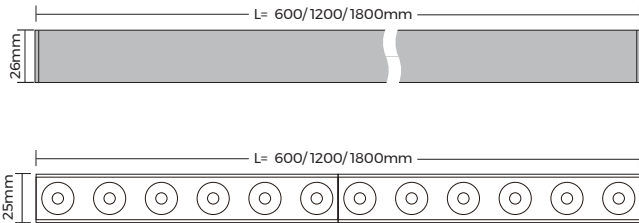

Wall lamp (15°x40°)



1. If 0.15-0.3m away from the wall, the effective wall washing distance is 4-6m, and the best distance from the wall is 0.25m
2. For wall washing, the best adjustable angle range is 5-10°, and the effective wall washing distance is 4-5m

Wall lamp (25°)



1. If 0.15-0.3m away from the wall, the effective wall washing distance is 2-4m, and the best distance from the wall is 0.3m
2. For wall washing, the optimal adjustable angle range is 5-10°, and the effective wall washing distance is 3-4m

Ordering Code


Category	-	Series	Section Size		Diffuser Shape		Diffuser Nature		Carrier Style		Profile Color		End Cap Style		Length	Version	-	Light Source Type		Light Source Power		CCT		CRI		Power Type		-	Package		Label Type	
LLS	-	T-bar	LM	26	Grating	G	15°x40°	F	NO Carrier	X	Silver	S	Holeless end cap	S	600mm	/	-	24VDC Rigid module	R	23W/m	23	2700K	SW	>90	9	No Power	X	-	COLORS Individual	D	COLORS	C
							25°	E	Flat	X	White	W			1200mm	(A)						3000K	WW							Customized	S	
											Black	B			1800mm							3500K	PW									
																						4000K	NW									
LLS	-		LM	26		G		F		X		S		S	600	-		R		23		NW		9		X	-		D			

LLS- - LM 26 G F X S S 600 - R 23 NW 9 X - D C

Ordering luminaires kits LLS-LM26GFXSS600-R23NW9X-DC


LLS-LM23

- 23mm slender lighting surface .
- 80 Lm/w high light efficiency design , lumen output up to 1100 Lm/m .
- Multiple standard corner (L type , X type , T type optional) available for free connection .
- A variety of light distribution optional (diffuser, prismatic, round grating 25°x60°x75°) to meet the needs of various scenarios.




Basic Parameters

Profile material	AL6063-T5
Surface processing	Spraying RAL9003 ☐ Spraying RAL9005 ☒ Anodizing
CCT	2700K3000K3500K4000K
CRI	Ra90

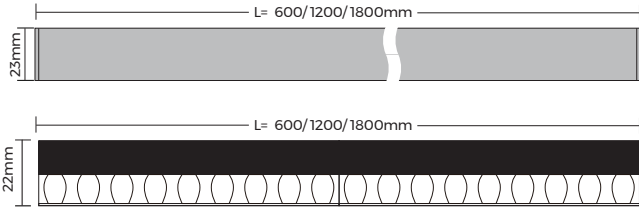

	600mm	1200mm	1800mm
Grating		25°x60°x75° 14W/1120LM	28W/2240LM 42W/3360LM

Wall washer (25°x60°x75°)

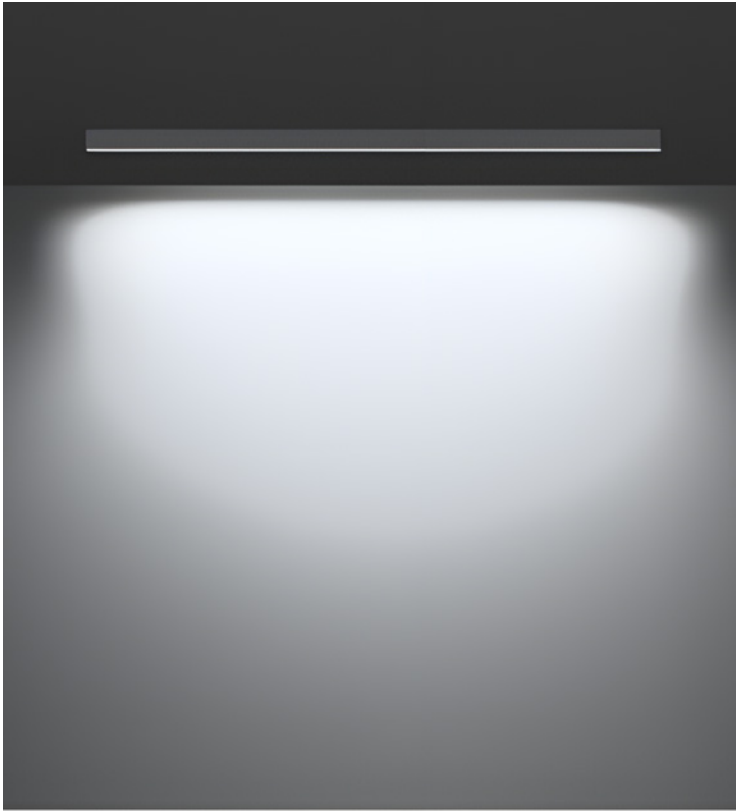

If 0.5-1m away from the wall, the effective wall washing distance is 2-3m. The best distance from the wall is 0.8m, the main illumination on the wall is about 500lx, and the uniformity of illumination within 2m is > 0.8.

Ordering Code

Category	-	Series	Section Size		Diffuser Shape		Diffuser Nature		Carrier Style		Profile Color		End Cap Style		Length	Version	-	Light Source Type		Light Source Power		CCT		CRI		Power Type		-	Package		Label Type	
LLS	-	T-bar	LM	23	Grating	G	Wall washing lens	W	NO Carrier	X	Silver	S	Holeless end cap	S	600mm	/	-	24VDC Rigid module	R	23W/m	23	2700K	SW	>90	9	No Power	X	-	COLORS Individual	D	COLORS	C
									Flat	X	White	W			1200mm	(A)						3000K	WW								Customized	S
											Black	B			1800mm							3500K	PW									
															4000K	NW																
LLS	-		LM	23		G	W		X		S		S	600	-		F		23		NW		8		X	-		D		C		

Ordering luminaires kits LLS-LM23CWXS600-F23NW8X-DC







LH25 Surface mounted





LM25



LE25



LC25



